

Tripper®

**Lauritz
Knudsen**

Electrical & Automation



**Keeping your loved ones
and appliances safe, always.**

INDERSONS, S-11 Rajouri Garden, New Delhi 110027 email: sales@indersonsindia.com




World Class Safety Standards

Tripper products conform to relevant global standards viz., IEC, EN and IS. They also have CE/ISI marking and DEKRA certification.



Safety Redefined

Finger proof terminals eliminate chances of accidental contact with live parts. You can install, operate and maintain tripper with total confidence.



Energy Limiting Class - 3

If fault occurs, the rapid arc quenching mechanism operates and extinguishes the arc quickly, ensuring lowest possible energy flow through the circuit. This minimizes risk of fire and maximizes life of your equipment.




Safety Meets Superior Aesthetics

Ergonomically designed, profiled for superior cooling and manufactured with fire retardant material. Tripper offers user safety combined with elegance.




True Contact Indication

Tripper range enhances safety through true contact indication even from a distance regardless of it's knob position. Red and Green indication flag positively identifies the electrical ON/OFF status.




Innovatively Profiled Breathing Channels

When two or more poles are placed adjacent to each other, the breathing channels are so profiled that the air circulates around individual pole, resulting in cooler operation, year after year.




Large Terminal Size & Biconnect

Tripper can easily accommodate cables of up to 35 sq.mm. Biconnect terminals offer convenience of connecting both cable and bus bar.



Two Position DIN Rail Clip

Installation on a DIN rail is further simplified with a two position DIN rail clip as a standard feature. Tripper range makes mounting on a standard DIN rail more convenient.



Non-Welding Contacts

Silver Graphite contact tips ensure higher life and maximum safety against contact welding due to it's superior anti-welding properties, enhancing safety and life of the system.



Combihead Screw

Tripper range of products provided with combihead screws allow you to use standard as well as Phillips screwdrivers, offering flexibility.



HIGHLIGHTS

- marked, marked
- Conforms to IS/IEC 60898 - 6 kA
- Higher life with use of heavy duty contacts
- Innovatively designed breathing channels between poles ensure cooler operation
- Energy saving - watt loss approximately 50% lower than those prescribed by IEC standard
- Manufactured with high quality fire retardant material
- True contact indication for enhanced safety

MINIATURE CIRCUIT BREAKERS (MCBs) - B CURVE



Description	Single Pole			
	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
6A B Curve	1	BA10060B	211	1/12
10A B Curve	1	BA10100B	211	1/12
16A B Curve	1	BA10160B	211	1/12
20A B Curve	1	BA10200B	211	1/12
25A B Curve	1	BA10250B	211	1/12
32A B Curve	1	BA10320B	211	1/12
40A B Curve	1	BA10400B	500	1/12



MINIATURE CIRCUIT BREAKERS (MCBs) - C CURVE

Description	Single Pole				Double Pole				Three Pole				Four Pole			
	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
6A C Curve	1	BA10060C	211	1/12	2	BA20060C	790	1/6	3	BA30060C	1330	1/4	4	BA40060C	1735	1/3
10A C Curve	1	BA10100C	211	1/12	2	BA20100C	790	1/6	3	BA30100C	1330	1/4	4	BA40100C	1735	1/3
16A C Curve	1	BA10160C	211	1/12	2	BA20160C	790	1/6	3	BA30160C	1330	1/4	4	BA40160C	1735	1/3
20A C Curve	1	BA10200C	211	1/12	2	BA20200C	790	1/6	3	BA30200C	1330	1/4	4	BA40200C	1735	1/3
25A C Curve	1	BA10250C	211	1/12	2	BA20250C	790	1/6	3	BA30250C	1330	1/4	4	BA40250C	1735	1/3
32A C Curve	1	BA10320C	211	1/12	2	BA20320C	790	1/6	3	BA30320C	1330	1/4	4	BA40320C	1735	1/3
40A C Curve	1	BA10400C	500	1/12	2	BA20400C	1165	1/6	3	BA30400C	1915	1/4	4	BA40400C	2305	1/3
63A C Curve	1	BA10630C	555	1/12	2	BA20630C	1295	1/6	3	BA30630C	2055	1/4	4	BA40630C	2450	1/3



*Module Width: 1 Mod = 17.5 mm

HIGHLIGHTS

- marked, marked
- Conforms to IS 12640 - 1, IEC 61008-1
- Available in DP & FP versions from 25A to 63A ratings with 30mA, 100mA & 300mA sensitivity
- Operates on Core Balance Current Transformer (CBCT) principle
- Finger proof IP20 terminals



RESIDUAL CURRENT CIRCUIT BREAKERS (RCCBS/ELCBS)

Description	Double Pole				Four Pole			
	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
25A 30mA	2	BC202503	2765	1	4	BC402503	3630	1
25A 100mA	2	BC202510	2865	1	4	BC402510	3695	1
25A 300mA	2	BC202530	2865	1	4	BC402530	3695	1
40A 30mA	2	BC204003	3055	1	4	BC404003	3685	1
40A 100mA	2	BC204010	3090	1	4	BC404010	3760	1
40A 300mA	2	BC204030	3090	1	4	BC404030	3760	1
63A 30mA	2	BC206303	3905	1	4	BC406303	4100	1
63A 100mA	2	BC206310	3955	1	4	BC406310	4160	1
63A 300mA	2	BC206330	3955	1	4	BC406330	4160	1

HIGHLIGHTS

- marked
- Conforms to IEC 60947 - 3
- Higher life with use of heavy duty contacts
- Innovatively designed breathing channels between poles ensure cooler operation
- Manufactured with high quality fire retardant material
- True contact indication for enhanced safety



ISOLATORS

Description	Double Pole				Three Pole				Four Pole			
	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
40A Isolator	2	BE204000	505	1/6	3	BE304000	875	1/4	4	BE404000	1130	1/3
63A Isolator	2	BE206300	630	1/6	3	BE306300	1000	1/4	4	BE406300	1170	1/3
100A Isolator	2	BE210000	855	1/6	3	BE310000	1185	1/4	4	BE410000	1415	1/3



*Module Width: 1 Mod = 17.5 mm

HIGHLIGHTS

- CE marked
- Conforms to IEC 60947-6, IEC 60947-3
- Wide Range of Current Ratings
 - Generator Side - 1.5A to 30A
 - Electricity Board Side - 30A
- No. of Poles 1P+N, for single phase applications
- Protection Degree - IP20
- Reliable microcontroller based design for sensing & control
- Lower power consumption
- RoHS compliant



AUTOMATIC CHANGEOVER WITH CURRENT LIMITER(ACCL)

Description EB/DG	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
30A/1.5A	4	BCL010301E5	2125	1
30A/2.5A	4	BCL010302E5	2125	1
30A/3A	4	BCL01030003	2125	1
30A/4A	4	BCL01030004	2125	1
30A/5A	4	BCL01030005	2125	1
30A/6A	4	BCL01030006	2125	1
30A/8A	4	BCL01030008	2125	1
30A/10A	4	BCL01030010	2125	1
30A/12A	4	BCL01030012	2125	1
30A/15A	4	BCL01030015	2125	1
30A/20A	4	BCL01030020	2125	1
30A/30A#	4	BCL01030030	2125	1

#Non current limiting variant

HIGHLIGHTS

- Settable overload current limit at DG side
- Separate power consumption monitoring for Mains & Genset
- Settable overvoltage & undervoltage protection
- Settable TPN or SPN mode at DG side
- Protection against single phasing

For 3 Phase ACCL programming video please scan the QR code or click here



THREE PHASE AUTOMATIC CHANGEOVER WITH CURRENT LIMITER (3PH ACCL) **NEW**



Description (AC-1) EB/DG	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
32A / 32A	AUCL03032032	12295	1
40A / 32A	AUCL03040032	12670	1
40A / 40A	AUCL03040040	13715	1
50A / 50A	AUCL03050050	19545	1
63A / 50A	AUCL03063050	21570	1
63A / 63A	AUCL03063063	24430	1
80A / 80A	AUCL03080080	37235	1
125A / 125A	AUCL03125125	62680	1

HIGHLIGHTS

- Conforms to IEC 60947-3
- Available with 3 positions (I-O-II) with centre off position
- Utilization category AC-22A



MODULAR CHANGEOVER SWITCHES


Double Pole					Four Pole				
Description	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	Description	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
25A	2	AUC00202500	1795	1	40A	4	AUC00404000	4730	1
40A	2	AUC00204000	2745	1	63A	6	AUC00406300	5365	1
63A	3	AUC00206300	3195	1					

*Module Width: 1 Mod = 17.5 mm



HIGHLIGHTS

- marked, marked
- Conforms to IS 12640-2, IEC 61009-1, EN 61009-1
- Short Circuit Breaking Capacity - 10kA
- Wide range of current ratings - 6A to 100A
- Suitable for Isolation
- Safety Shutter
- Line-load Reversibility
- True Position Indication
- Trip-free Mechanism
- Easy fault identification -
 1. Short Circuit fault Indication :
Clear indication by amber coloured flag
 2. Earth Leakage Fault Indication :
Clear indication by yellow coloured flag

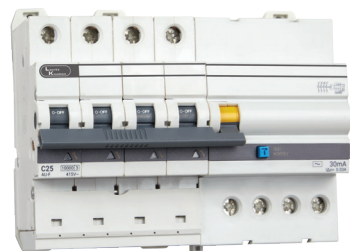

RESIDUAL CURRENT CIRCUIT BREAKER WITH OVER CURRENT PROTECTION (RCBOs)

Double Pole

Description	100 mA				30 mA			
	MW*	Cat No (30 mA)	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No (100 mA)	MRP/Unit in ₹	Std. Pkg. (Nos.)
6A 2P RCBO	2	AUF3C200603	5405	1	2	AUF3C200610	5515	1
10A 2P RCBO	2	AUF3C201003	5405	1	2	AUF3C201010	5515	1
16A 2P RCBO	2	AUF3C201603	5405	1	2	AUF3C201610	5515	1
20A 2P RCBO	2	AUF3C202003	5405	1	2	AUF3C202010	5515	1
25A 2P RCBO	2	AUF3C202503	5405	1	2	AUF3C202510	5515	1
32A 2P RCBO	2	AUF3C203203	5405	1	2	AUF3C203210	5515	1
40A 2P RCBO	2	AUF3C204003	5405	1	2	AUF3C204010	5515	1
63A 2P RCBO	4	AUF3C206303	6415	1	4	AUF3C206310	6805	1

RESIDUAL CURRENT CIRCUIT BREAKER WITH OVER CURRENT PROTECTION (RCBOs)

Four Pole

Description	100 mA				30 mA			
	MW*	Cat No (30 mA)	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No (100 mA)	MRP/Unit in ₹	Std. Pkg. (Nos.)
C16A 4P RCBO	7.5	AUF3C401603	5800	1	7.5	AUF3C401610	6460	1
C20A 4P RCBO	7.5	AUF3C402003	5800	1	7.5	AUF3C402010	6460	1
C25A 4P RCBO	7.5	AUF3C402503	5800	1	7.5	AUF3C402510	6460	1
C32A 4P RCBO	7.5	AUF3C403203	5990	1	7.5	AUF3C403210	6465	1
C40A 4P RCBO	7.5	AUF3C404003	6085	1	7.5	AUF3C404010	6465	1
C63A 4P RCBO	7.5	AUF3C406303	7290	1	7.5	AUF3C406310	7425	1
C80A 4P RCBO	12	AUF3C408003	27740	1	12	AUF3C408010	28360	1
C100A 4P RCBO	12	AUF3C410003	29655	1	12	AUF3C410010	30365	1



*Module Width: 1 Mod = 17.5 mm
Note: CB9000---O' Cat. Nos. of ELMCBs range are discontinued.

Trip  *box NXT*



Electrical & Automation




**Smart protection for
safer homes.**

Tripbox NXT



Designed for Safety Styled for You



Curved Door
Adds a stylish touch



Over-the-frame Design
Delivers higher protection



Uniform Gasketing
Ensures press protection

SPN DISTRIBUTION BOARDS

- Available in 4, 6, 8, 12 & 16 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bar, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- Choice of metal and glazed door
- With provision for DP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing



SPN DISTRIBUTION BOARDS

NEW

Description	Modules		Double Door	MRP/Unit in ₹	Double Door - Glazed	MRP/Unit in ₹
	Incomer	Outgoing				
4-Way	2	2	DTSPN004DD	1705	DTSPN004GD	2245
6-Way	2	4	DTSPN006DD	2000	DTSPN006GD	2400
8-Way	2	6	DTSPN008DD	2125	DTSPN008GD	2620
12-Way	2	10	DTSPN012DD	2555	DTSPN012GD	3180
16-Way	2	14	DTSPN016DD	3200	DTSPN016GD	3930

TPN DISTRIBUTION BOARDS

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- Choice of metal and glazed door
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing



TPN DISTRIBUTION BOARDS

NEW

Description	Modules		Double Door	MRP/Unit in ₹	Double Door - Glazed	MRP/Unit in ₹
	Incomer	Outgoing				
4-Way	8	4+4+4	DTTPN004DD	4220	DTTPN004GD	5510
6-Way	8	6+6+6	DTTPN006DD	5265	DTTPN006GD	6835
8-Way	8	8+8+8	DTTPN008DD	6295	DTTPN008GD	8175
12-Way	8	12+12+12	DTTPN012DD	9365	DTTPN012GD	12515

HORIZONTAL PPI (PER PHASE ISOLATION) DBs

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing



HORIZONTAL PPI (PER PHASE ISOLATION) DBs

NEW

Description	Modules			Double Door	MRP/Unit in ₹
	Incomer	Sub-Incomer	Outgoing		
4-Way	8	2+2+2	4+4+4	DTHPI004DD	6980
6-Way	8	2+2+2	6+6+6	DTHPI006DD	8365
8-Way	8	2+2+2	8+8+8	DTHPI008DD	9975
12-Way	8	2+2+2	12+12+12	DTHPI012DD	13590

PHASE SEGREGATED DBs

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing



PHASE SEGREGATED DBs

NEW

Description	Modules			Double Door	MRP/Unit in ₹
	Incomer	Sub-Incomer	Outgoing		
4-Way	8	4+4+4	4+4+4	DTPSG004DD	10995
6-Way	8	4+4+4	6+6+6	DTPSG006DD	12415
8-Way	8	4+4+4	8+8+8	DTPSG008DD	13860
12-Way	8	4+4+4	12+12+12	DTPSG012DD	17490

PHASE SELECTOR DBs

- Available in 4, 6, 8 & 12 way
- Provided with 63A Selector Switches
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing



PHASE SELECTOR DBs*

Description	Modules		Double Door	MRP/Unit in ₹
	Incomer	Outgoing		
4-Way	8	4+4+4	DTPSR004DD	13105
6-Way	8	6+6+6	DTPSR006DD	13420
8-Way	8	8+8+8	DTPSR008DD	14230
12-Way	8	12+12+12	DTPSR012DD	15965

VTPN DBs WITH MODULAR INCOMER

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, Insulated vertical phase bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP/TP MCBs as outgoing



VTPN DBs WITH MODULAR INCOMER

NEW

Description	Modules		Double Door	MRP/Unit in ₹
	Incomer	Outgoing		
4-Way	8	4+4+4	DTVMT004DD	10110
6-Way	8	6+6+6	DTVMT006DD	11620
8-Way	8	8+8+8	DTVMT008DD	13485
12-Way	8	12+12+12	DTVMT012DD	17845

VTPN DBs WITH MCCB INCOMER

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, Insulated vertical phase bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for MCCB as incomer and SP/TP MCBs as outgoing
- Suitable for 3P/4P MCCB as incomer upto 125A - DY125U



VTPN DBs WITH MCCB INCOMER

NEW

Description	Modules		Double Door	MRP/Unit in ₹
	Incomer	Outgoing		
4-Way	MCCB	4+4+4	DTVTL004DD	12065
6-Way	MCCB	6+6+6	DTVTL006DD	14120
8-Way	MCCB	8+8+8	DTVTL008DD	15335
12-Way	MCCB	12+12+12	DTVTL012DD	19830

ENCLOSURES

- Available in 2, 3, 4 & 6 way
- With provision to mount MCB/Isolator/RCCB/RCBO or other modular devices



Single Door

ENCLOSURES **NEW**

Description	Modules	Single Door	MRP/Unit in ₹
2-Way	2	DTENC002SD	500
3-Way	3	DTENC003SD	560
4-Way	4	DTENC004SD	560
6-Way	6	DTENC006SD	845

PLUG & SOCKET DBs

- SPN 10A & 20A; TPN - 32A
- With provision to mount MCBs/RCCBs



Single Door

PLUG & SOCKET DBs **NEW**

Description	No. of Pins	Modules	Single Door	MRP/Unit in ₹
10A, 2 Pin+SC^	P+N	1	DTMPS110SD	1270
20A, 2 Pin+SC^	P+N	1	DTMPS120SD	1355
20A, 2 Pin+SC^	P+N	2	DTMPS220SD	1480
32A, 3 Pin+SC^	3P	3	DTMPS332SD	3505

SC^ - Scrapping Earth

METAL PLUG & SOCKET

- Designed to ensure safe functioning of electrical equipment and the user safety
- Plugs & Sockets find its applications at air conditioners, welding machines, industrial equipment, etc., are made of non corrosive aluminum alloy
- Conforms to IS 8804



METAL PLUG & SOCKET

Description	No. of Pins	Cat No	MRP/Unit in ₹
Metal Plug			
10A, 2 Pin+SC^	P+N	MPS210P	255
20A, 2 Pin+SC^	P+N	MPS220P	270
20A, 3 Pin+SC^	3P	MPS320P	355
32A, 3 Pin+SC^	3P	MPS332P	675
Metal Socket			
10A, 2 Pin+SC^	P+N	MPS210S	265
20A, 2 Pin+SC^	P+N	MPS220S	290
20A, 3 Pin+SC^	3P	MPS320S	400
32A, 3 Pin+SC^	3P	MPS332S	675

SC^ - Scrapping Earth

Note: Standard Pack Quantity for Metal Plug & Socket - 20 Nos.

VALUE + STYLE

The Tripbox PLUS range of Distribution Boards offer the perfect blend of aesthetics and value. Crafted for modern homes, its features ensure ease of installation, enhanced safety and protection with a dash of style.



SAFETY WITH STYLE

Options for flush and surface mounting


Powder - coated, matte finish - RAL9003

Insulated Busbar



As per IS 8623 Standards

Shrouded neutral bars to avoid accidental contact with live parts

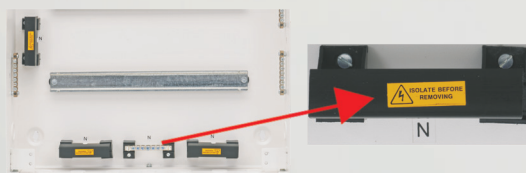


EASE OF INSTALLATION

Reversible door for double door Distribution Boards to adapt to site conditions



More space for ease of wiring

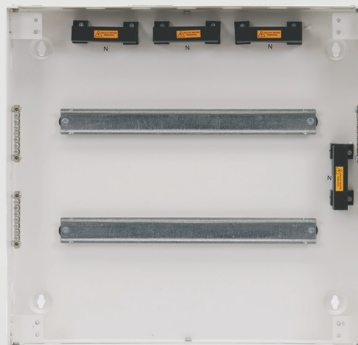


PROTECTION FROM DAMAGE

CRCA sheet steel for extra durability

Plastic corners for corner protection




Cement spill protector - To protect DB interior from cement splashes during civil work



SPN DISTRIBUTION BOARDS

- Available in 4, 6, 8, 12 & 16 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bar, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- Choice of metal and glazed door
- With provision for DP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing

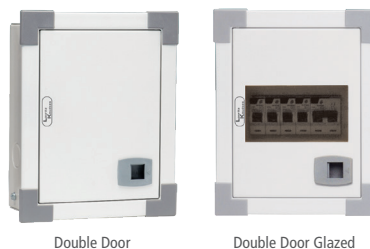

Double Door

Double Door Glazed

SPN DISTRIBUTION BOARDS*

Description	Modules		Double Door	MRP/Unit in ₹	Double Door - Glazed	MRP/Unit in ₹
	Incomer	Outgoing				
4-Way	2	2	PH104DDB	1705	PH104DDG	2245
6-Way	2	4	PH106DDB	2000	PH106DDG	2400
8-Way	2	6	PH108DDB	2125	PH108DDG	2620
12-Way	2	10	PH112DDB	2555	PH112DDG	3180
16-Way	2	14	PH116DDB	3200	PH116DDG	3930

TPN DISTRIBUTION BOARDS

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- Choice of metal and glazed door
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing



Double Door

Double Door Glazed

TPN DISTRIBUTION BOARDS*

Description	Modules		Double Door	MRP/Unit in ₹	Double Door - Glazed	MRP/Unit in ₹
	Incomer	Outgoing				
4-Way	8	4+4+4	PH304DDB	4220	PH304DDG	5510
6-Way	8	6+6+6	PH306DDB	5265	PH306DDG	6835
8-Way	8	8+8+8	PH308DDB	6295	PH308DDG	8175
12-Way	8	12+12+12	PH312DDB	9365	PH312DDG	12515

HORIZONTAL PPI (PER PHASE ISOLATION) DBs

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing



Double Door

HORIZONTAL PPI (PER PHASE ISOLATION) DBs*

Description	Modules			Double Door	MRP/Unit in ₹
	Incomer	Sub-Incomer	Outgoing		
4-Way	8	2+2+2	4+4+4	PHP304DDB	6980
6-Way	8	2+2+2	6+6+6	PHP306DDB	8365
8-Way	8	2+2+2	8+8+8	PHP308DDB	9975
12-Way	8	2+2+2	12+12+12	PHP312DDB	13590

*These DBs are available till stock last.

PHASE SEGREGATED DBs

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing



Double Door

PHASE SEGREGATED DBs*

Description	Modules			Double Door	MRP/Unit in ₹
	Incomer	Sub-Incomer	Outgoing		
4-Way	8	4+4+4	4+4+4	PHS304DDB	10995
6-Way	8	4+4+4	6+6+6	PHS306DDB	12415
8-Way	8	4+4+4	8+8+8	PHS308DDB	13860
12-Way	8	4+4+4	12+12+12	PHS312DDB	17490

PHASE SELECTOR DBs

- Available in 4, 6, 8 & 12 way
- Provided with 63A Selector Switches
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing



Double Door

PHASE SELECTOR DBs*

Description	Modules		Double Door	MRP/Unit in ₹
	Incomer	Outgoing		
4-Way	8	4+4+4	PHC04DDB	13795
6-Way	8	6+6+6	PHC06DDB	14125
8-Way	8	8+8+8	PHC08DDB	14980
12-Way	8	12+12+12	PHC12DDB	16805

VTPN DBs WITH MODULAR INCOMER

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, Insulated vertical phase bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP/TP MCBs as outgoing



Double Door

VTPN DBs WITH MODULAR INCOMER*

Description	Modules		Double Door	MRP/Unit in ₹
	Incomer	Outgoing		
4-Way	8	4+4+4	PHV304DDB	10110
6-Way	8	6+6+6	PHV306DDB	11620
8-Way	8	8+8+8	PHV308DDB	13485
12-Way	8	12+12+12	PHV312DDB	17845

VTPN DBs WITH MCCB INCOMER

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, Insulated vertical phase bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for MCCB as incomer and SP/TP MCBs as outgoing
- Suitable for 3P/4P MCCB as incomer upto 125A - DY125U



Double Door

VTPN DBs WITH MCCB INCOMER*

Description	Modules		Double Door	MRP/Unit in ₹
	Incomer	Outgoing		
4-Way	MCCB	4+4+4	PHV304DYM	12065
6-Way	MCCB	6+6+6	PHV306DYM	14120
8-Way	MCCB	8+8+8	PHV308DYM	15335
12-Way	MCCB	12+12+12	PHV312DYM	19830

*These DBs are available till stock last.

ENCLOSURES

- Available in 2, 3, 4 & 6 way
- With provision to mount MCB/Isolator/RCCB/RCBO or other modular devices



Single Door

ENCLOSURES*

Description	Modules	Single Door	MRP/Unit in ₹
2-Way	2	PHE02DB	500
3-Way	3	PHE03DB	560
4-Way	4	PHE04DB	560
6-Way	6	PHE06DB	845

PLUG & SOCKET DBs

- SPN 10A & 20A; TPN - 32A
- With provision to mount MCBs/RCCBs



Single Door

PLUG & SOCKET DBs*

Description	No. of Pins	Modules	Single Door	MRP/Unit in ₹
10A, 2 Pin+SC^	P+N	1	PMP110DB	1270
20A, 2 Pin+SC^	P+N	1	PMP120DB	1355
20A, 2 Pin+SC^	P+N	2	PMP220DB	1480
32A, 3 Pin+SC^	3P	3	PMP332DB	3505

SC^ - Scrapping Earth

*These DBs are available till stock last.

SINGLE PHASE NEUTRAL (SPN) DBs

Description	Modules		Single Door	MRP/Unit in ₹	Double Door	MRP/Unit in ₹
	Incomer	Outgoing				
4 way	2	2	BH104SDB	950	BH104DDB	1520
6 way	2	4	BH106SDB	1045	BH106DDB	1710
8 way	2	6	BH108SDB	1180	BH108DDB	1865
12 way	2	10	BH112SDB	1570	BH112DDB	2275
16 way	2	14	BH116SDB	1955	BH116DDB	2800



Single Door



Double Door

HIGHLIGHTS

- Ready to use DBs, complete with colour - coded wire set, 100A bus bar, Neutral bar/s & Earth bar/s
- Superior quality powder coating for better looks and longer life
- DB is suitable for surface or flush mounting



Double Door

THREE PHASE NEUTRAL (TPN) DBs

Description	Modules		Single Door	MRP/Unit in ₹	Double Door	MRP/Unit in ₹
	Incomer	Outgoing				
4 way	8	4+4+4	BH304SDB	2945	BH304DDB	3805
6 way	8	6+6+6	BH306SDB	3640	BH306DDB	4675
8 way	8	8+8+8	BH308SDB	4205	BH308DDB	5670
12 way	8	12+12+12	BH312SDB	5965	BH312DDB	8155



Double Door

PHASE SELECTOR DBs

Description	Modules		Double Door	MRP/Unit in ₹
	Incomer	Outgoing		
4 way	8	4+4+4	BHC04DDB	11980
6 way	8	6+6+6	BHC06DDB	12510

Provided with 40A selector switches