

Acti 9 | Advanced Communication Technology that Inspires

> Protection devices

- Miniature circuit breakers
- Residual current circuit breakers
- Vigi™ residual current devices
- Surge Protection Devices

> Protection monitoring and supervision

- Indication and tripping auxiliaries
- Remote control auxiliaries
- Automatic reclosure auxiliaries



Innovative
Protection monitoring Total control and
Metering @ DB level



Efficient
Manage loads, reduce operating and project
costs, and accurately plan maintenance

> Control and monitoring

- Contactors
- Impulse relays
- Integrated control circuit breakers
- Light indicators
- Push-buttons and selector switches
- Communication Architecture

> Installation system

- IP20B terminals
- Splitter blocks
- Full range of mounting and wiring accessories



Reliable

100 percent MCB and RCD coordination, easy ordering and design, error free fast connections

Acti 9 | Advanced Communication Technology that Inspires.....

> Innovative


- Centralized control system including energy metering
- Large and variable data reading and computing through universal Modbus protocol

> Efficient

- One-click, prefabricated wiring for comprehensive communication between your distribution board or panel and any facility management system

> Reliable


- Error proof connection leading to reduction in downtime
- EMC tested for immunity, radiated and conducted safety

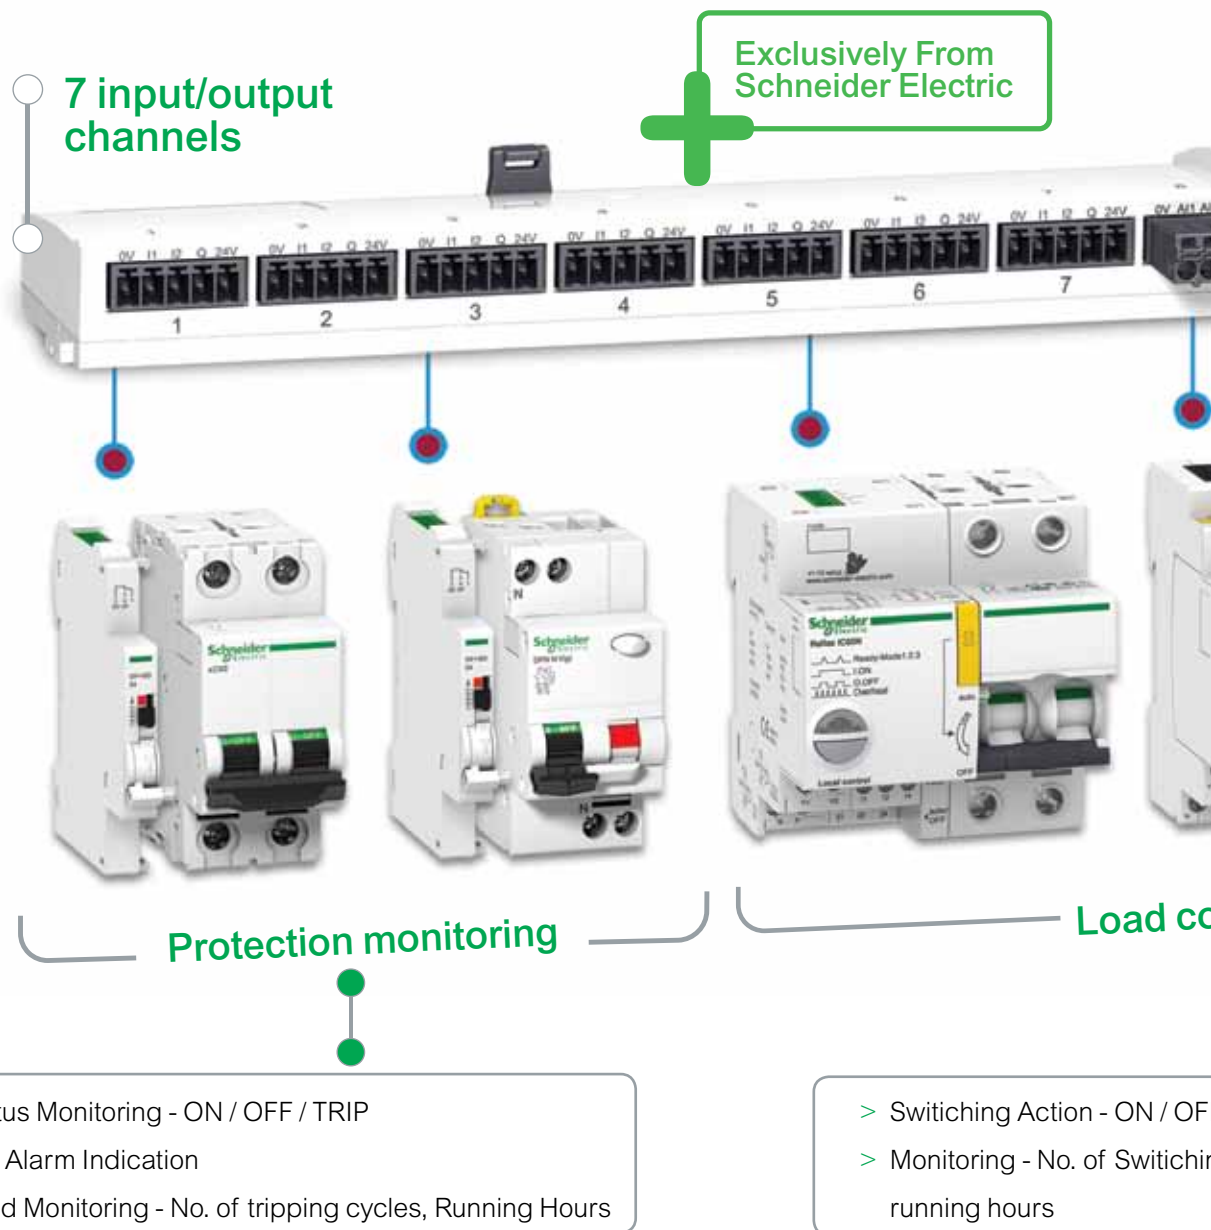

Meets the challenge of all your applications

Detailed load control, reduced downtime and accurately planned maintenance

Ready to connect to any facility management solution

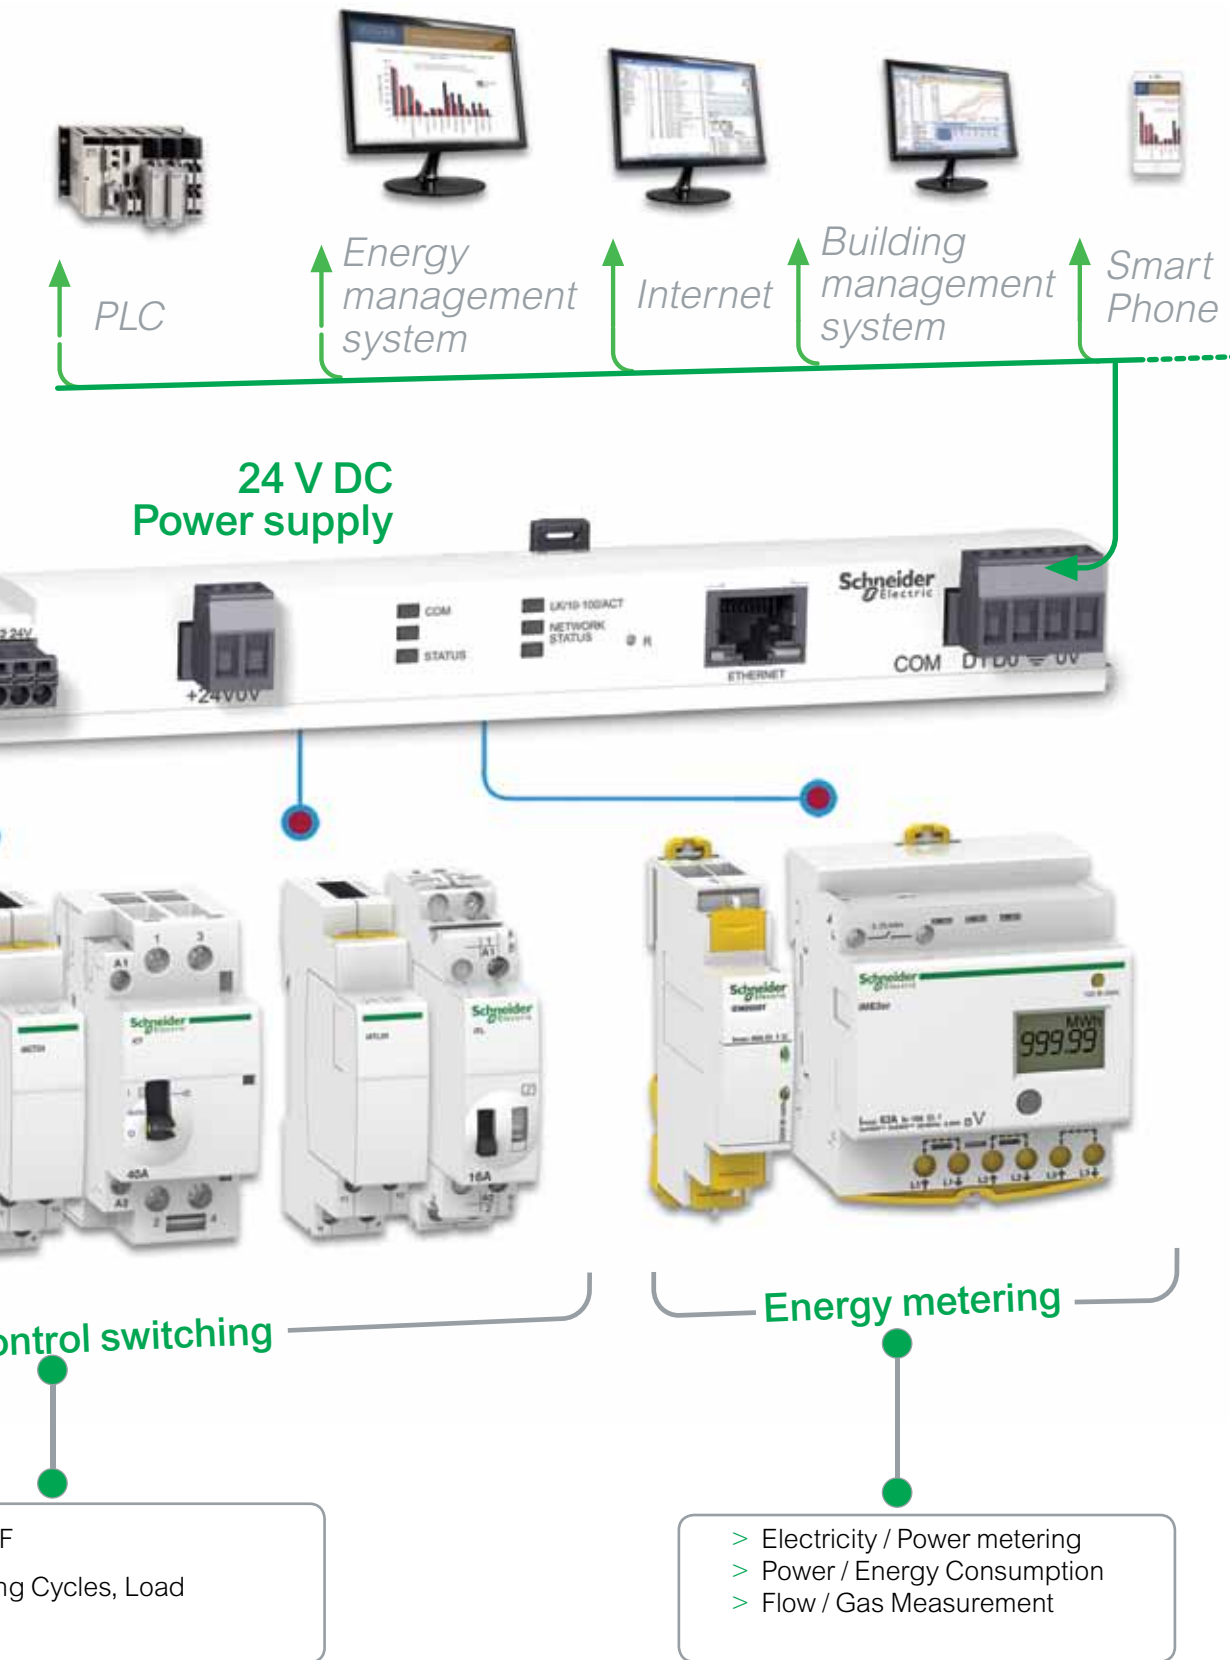

Environmental data program
REACH, RoHS, PEP, EOL compliant

AC Miniature Circuit Breakers - xC60 - IS/IEC 60898-1



- Breaking Capacity as per IEC 60898 and IS/IEC 60898-1, Icn = 10kA
- Can be used for DC application upto 60V per pole
- Higher Installation Life: Energy Limitation Class 3, Fast Closure Mechanism
- Ease, Speed and Flexibility of installation - Biconnect, Line-Load Reversible
- Field-fittable auxiliaries for advance protection and monitoring
- Positive Contact Indication for assurance of disconnection

[In] Rated Current (A)	1 Pole Reference	Unit MRP [₹]	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width**	1 mod		2 mod		3 mod		4 mod	
MOQ	12 Nos.		6 Nos.		4 Nos.		3 Nos.	
B curve								
6	A9N1P06BGN <input checked="" type="checkbox"/>	502	A9N2P06BGN <input checked="" type="checkbox"/>	1516	A9N3P06BGN <input checked="" type="checkbox"/>	2515	A9N4P06BGN	3212
10	A9N1P10BGN <input checked="" type="checkbox"/>	502	A9N2P10BGN <input checked="" type="checkbox"/>	1516	A9N3P10BGN <input checked="" type="checkbox"/>	2515	-	-
16	A9N1P16BGN <input checked="" type="checkbox"/>	502	A9N2P16BGN <input checked="" type="checkbox"/>	1516	A9N3P16BGN <input checked="" type="checkbox"/>	2515	A9N4P16BGN	3212
20	A9N1P20BGN <input checked="" type="checkbox"/>	502	A9N2P20BGN <input checked="" type="checkbox"/>	1516	A9N3P20BGN	2515	-	-
25	A9N1P25BGN <input checked="" type="checkbox"/>	502	-	-	A9N3P25BGN <input checked="" type="checkbox"/>	2515	-	-
32	A9N1P32BGN <input checked="" type="checkbox"/>	502	A9N2P32BGN	1516	A9N3P32BGN <input checked="" type="checkbox"/>	2515	A9N4P32BGN	3212
40	A9N1P40BGN <input checked="" type="checkbox"/>	1090	-	-	A9N3P40BGN	3432	A9N4P40BGN	4878
63	A9N1P63BGN <input checked="" type="checkbox"/>	1105	-	-	A9N3P63BGN <input checked="" type="checkbox"/>	3863	A9N4P63BGN	4923
C curve								
1	A9N1P01CGN <input checked="" type="checkbox"/>	770	A9N2P01CGN <input checked="" type="checkbox"/>	2089	A9N3P01CGN <input checked="" type="checkbox"/>	3313	A9N4P01CGN <input checked="" type="checkbox"/>	4169
2	A9N1P02CGN <input checked="" type="checkbox"/>	770	A9N2P02CGN	2099	A9N3P02CGN <input checked="" type="checkbox"/>	3313	A9N4P02CGN <input checked="" type="checkbox"/>	4169
3	A9N1P03CGN <input checked="" type="checkbox"/>	770	A9N2P03CGN <input checked="" type="checkbox"/>	2099	A9N3P03CGN <input checked="" type="checkbox"/>	3313	-	-
4	A9N1P04CGN <input checked="" type="checkbox"/>	770	A9N2P04CGN <input checked="" type="checkbox"/>	2099	A9N3P04CGN <input checked="" type="checkbox"/>	3313	A9N4P04CGN <input checked="" type="checkbox"/>	4169
6	A9N1P06CGN <input checked="" type="checkbox"/>	456	A9N2P06CGN <input checked="" type="checkbox"/>	1516	A9N3P06CGN <input checked="" type="checkbox"/>	2515	A9N4P06CGN <input checked="" type="checkbox"/>	3389
10	A9N1P10CGN <input checked="" type="checkbox"/>	456	A9N2P10CGN <input checked="" type="checkbox"/>	1516	A9N3P10CGN <input checked="" type="checkbox"/>	2515	A9N4P10CGN <input checked="" type="checkbox"/>	3389
16	A9N1P16CGN <input checked="" type="checkbox"/>	456	A9N2P16CGN <input checked="" type="checkbox"/>	1516	A9N3P16CGN <input checked="" type="checkbox"/>	2515	A9N4P16CGN <input checked="" type="checkbox"/>	3389
20	A9N1P20CGN <input checked="" type="checkbox"/>	456	A9N2P20CGN <input checked="" type="checkbox"/>	1516	A9N3P20CGN <input checked="" type="checkbox"/>	2515	A9N4P20CGN <input checked="" type="checkbox"/>	3389
25	A9N1P25CGN <input checked="" type="checkbox"/>	456	A9N2P25CGN <input checked="" type="checkbox"/>	1516	A9N3P25CGN <input checked="" type="checkbox"/>	2515	A9N4P25CGN <input checked="" type="checkbox"/>	3389
32	A9N1P32CGN <input checked="" type="checkbox"/>	456	A9N2P32CGN <input checked="" type="checkbox"/>	1516	A9N3P32CGN <input checked="" type="checkbox"/>	2515	A9N4P32CGN <input checked="" type="checkbox"/>	3389
40	A9N1P40CGN <input checked="" type="checkbox"/>	1090	A9N2P40CGN <input checked="" type="checkbox"/>	2440	A9N3P40CGN <input checked="" type="checkbox"/>	3830	A9N4P40CGN <input checked="" type="checkbox"/>	4923
50	A9N1P50CGN	1090	A9N2P50CGN	2440	A9N3P50CGN	3830	A9N4P50CGN	4923
63	A9N1P63CGN <input checked="" type="checkbox"/>	1105	A9N2P63CGN <input checked="" type="checkbox"/>	2461	A9N3P63CGN <input checked="" type="checkbox"/>	3957	A9N4P63CGN <input checked="" type="checkbox"/>	5127
D curve								
2	A9N1P02DGN <input checked="" type="checkbox"/>	777	A9N2P02DGN <input checked="" type="checkbox"/>	2121	-	-	-	-
3	A9N1P03DGN <input checked="" type="checkbox"/>	777	A9N2P03DGN	2121	A9N3P03DGN <input checked="" type="checkbox"/>	3363	-	-
4	A9N1P04DGN <input checked="" type="checkbox"/>	777	A9N2P04DGN <input checked="" type="checkbox"/>	2121	A9N3P04DGN <input checked="" type="checkbox"/>	3363	-	-
6	A9N1P06DGN <input checked="" type="checkbox"/>	655	A9N2P06DGN <input checked="" type="checkbox"/>	1589	A9N3P06DGN <input checked="" type="checkbox"/>	2649	-	-
10	A9N1P10DGN <input checked="" type="checkbox"/>	655	A9N2P10DGN <input checked="" type="checkbox"/>	1589	A9N3P10DGN <input checked="" type="checkbox"/>	2649	-	-
16	A9N1P16DGN <input checked="" type="checkbox"/>	655	A9N2P16DGN <input checked="" type="checkbox"/>	1589	A9N3P16DGN <input checked="" type="checkbox"/>	2649	A9N4P16DGN <input checked="" type="checkbox"/>	3514
20	A9N1P20DGN <input checked="" type="checkbox"/>	655	A9N2P20DGN <input checked="" type="checkbox"/>	1589	A9N3P20DGN <input checked="" type="checkbox"/>	2649	A9N4P20DGN <input checked="" type="checkbox"/>	3514
25	A9N1P25DGN <input checked="" type="checkbox"/>	655	A9N2P25DGN <input checked="" type="checkbox"/>	1589	A9N3P25DGN <input checked="" type="checkbox"/>	2649	A9N4P25DGN <input checked="" type="checkbox"/>	3514
32	A9N1P32DGN <input checked="" type="checkbox"/>	655	A9N2P32DGN <input checked="" type="checkbox"/>	1589	A9N3P32DGN <input checked="" type="checkbox"/>	2649	A9N4P32DGN <input checked="" type="checkbox"/>	3514
40	A9N1P40DGN <input checked="" type="checkbox"/>	1177	A9N2P40DGN <input checked="" type="checkbox"/>	2579	A9N3P40DGN <input checked="" type="checkbox"/>	4058	A9N4P40DGN <input checked="" type="checkbox"/>	5088
50	-	-	-	-	A9N3P50DGN	4058	-	-
63	A9N1P63DGN <input checked="" type="checkbox"/>	1191	A9N2P63DGN <input checked="" type="checkbox"/>	2610	A9N3P63DGN <input checked="" type="checkbox"/>	4094	A9N4P63DGN <input checked="" type="checkbox"/>	5141

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

AC Miniature Circuit Breakers - XC60 - IEC - 60947-2



- Breaking Capacity as per IEC 60947-2, Icu = 15kA***
- Can be used for DC application upto 60V per pole
- Higher system performance with optimized cost: Cascading*
- Increased System Continuity: Discrimination*
- Higher Installation Life: Energy Limitation Class 3, Fast Closure Mechanism
- Ease, Speed and Flexibility of installation - Biconnect, Line-Load Reversible
- Field-fittable auxiliaries for advance protection and monitoring
- Positive Contact Indication for assurance of disconnection

[In] Rated Current (A)	1 Pole Reference	Unit MRP [₹]	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width**	1 mod		2 mod		3 mod		4 mod	
MOQ	12 Nos.		6 Nos.		4 Nos.		3 Nos.	
B curve								
6	A9N1P06BIN ✓	517	A9N2P06BIN ✓	1561	A9N3P06BIN ✓	2591	-	-
10	A9N1P10BIN ✓	517	A9N2P10BIN ✓	1561	A9N3P10BIN ✓	2591	-	-
16	A9N1P16BIN ✓	517	A9N2P16BIN ✓	1561	A9N3P16BIN ✓	2591	-	-
20	A9N1P20BIN ✓	517	A9N2P20BIN ✓	1561	-	-	-	-
25	A9N1P25BIN ✓	517	-	-	A9N3P25BIN ✓	2591	-	-
32	A9N1P32BIN ✓	517	-	-	A9N3P32BIN ✓	2591	A9N4P32BIN ✓	3491
40	A9N1P40BIN ✓	1123	-	-	-	-	A9N4P40BIN ✓	5024
63	A9N1P63BIN ✓	1138	-	-	A9N3P63BIN ✓	3979	A9N4P63BIN ✓	5071
C curve								
1	A9N1P01CIN ✓	793	A9N2P01CIN ✓	2162	A9N3P01CIN ✓	3412	A9N4P01CIN ✓	4294
2	A9N1P02CIN ✓	793	A9N2P02CIN ✓	2162	A9N3P02CIN ✓	3412	A9N4P02CIN ✓	4294
3	A9N1P03CIN ✓	793	A9N2P03CIN ✓	2162	A9N3P03CIN ✓	3412	-	-
4	A9N1P04CIN ✓	793	A9N2P04CIN ✓	2162	A9N3P04CIN ✓	3412	A9N4P04CIN ✓	4294
6	A9N1P06CIN ✓	470	A9N2P06CIN ✓	1561	A9N3P06CIN ✓	2591	A9N4P06CIN ✓	3491
10	A9N1P10CIN ✓	470	A9N2P10CIN ✓	1561	A9N3P10CIN ✓	2591	A9N4P10CIN ✓	3491
16	A9N1P16CIN ✓	470	A9N2P16CIN ✓	1561	A9N3P16CIN ✓	2591	A9N4P16CIN ✓	3491
20	A9N1P20CIN ✓	470	A9N2P20CIN ✓	1561	A9N3P20CIN ✓	2591	A9N4P20CIN ✓	3491
25	A9N1P25CIN ✓	470	A9N2P25CIN ✓	1561	A9N3P25CIN ✓	2591	A9N4P25CIN ✓	3491
32	A9N1P32CIN ✓	470	A9N2P32CIN ✓	1561	A9N3P32CIN ✓	2591	A9N4P32CIN ✓	3491
40	A9N1P40CIN ✓	1123	A9N2P40CIN ✓	2514	A9N3P40CIN ✓	3945	A9N4P40CIN ✓	5071
50	A9N1P50CIN	1123	A9N2P50CIN	2514	A9N3P50CIN	3945	A9N4P50CIN	5071
63	A9N1P63CIN ✓	1138	A9N2P63CIN ✓	2537	A9N3P63CIN ✓	4076	A9N4P63CIN ✓	5282
D curve								
2	A9N1P02DIN ✓	800	A9N2P02DIN ✓	2185	-	-	-	-
3	A9N1P03DIN ✓	800	-	-	A9N3P03DIN ✓	3465	-	-
4	A9N1P04DIN ✓	800	A9N2P04DIN ✓	2185	A9N3P04DIN ✓	3465	-	-
6	A9N1P06DIN ✓	675	A9N2P06DIN ✓	1638	A9N3P06DIN ✓	2730	-	-
10	A9N1P10DIN ✓	675	A9N2P10DIN ✓	1638	A9N3P10DIN ✓	2730	-	-
16	A9N1P16DIN ✓	675	A9N2P16DIN ✓	1638	A9N3P16DIN ✓	2730	A9N4P16DIN ✓	3620
20	A9N1P20DIN ✓	675	A9N2P20DIN ✓	1638	A9N3P20DIN ✓	2730	A9N4P20DIN ✓	3620
25	A9N1P25DIN ✓	675	A9N2P25DIN ✓	1638	A9N3P25DIN ✓	2730	A9N4P25DIN ✓	3620
32	A9N1P32DIN ✓	675	A9N2P32DIN ✓	1638	A9N3P32DIN ✓	2730	A9N4P32DIN ✓	3620
40	A9N1P40DIN ✓	1213	A9N2P40DIN ✓	2657	A9N3P40DIN ✓	4180	A9N4P40DIN ✓	5242
50	-	-	-	-	A9N3P50DIN	4180	A9N4P50DIN	5242
63	A9N1P63DIN	1226	A9N2P63DIN ✓	2689	A9N3P63DIN ✓	4217	A9N4P63DIN ✓	5295

***Coming Soon

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

DC Miniature Circuit Breakers - C60H



Suitable for
ComReady
Auxiliary



- Specially designed MCB for enhanced protection in DC installation
- Magnetic Arc Chutes to quick break DC current in event of fault
- Breaking capacity 6kA as per IEC 60947-2
- Voltage Rating: 1P - 250 V DC & 2P - 500 V DC
- Impulse Voltage: 6 kV
- Higher Installation Life: Energy Limiting Class: 3

[In] Rated Current (A)	Module Width 18mm/ module	1 Pole Reference	Unit MRP [₹]	Module Width 18mm/ module	2 Pole Reference	Unit MRP [₹]
MOQ		12 Nos.		6 Nos.		
C60H-DC						
0.5	1	A9N61500	1948	2	A9N61520	4278
1	1	A9N61501 <input checked="" type="checkbox"/>	1421	2	A9N61521 <input checked="" type="checkbox"/>	2932
2	1	A9N61502 <input checked="" type="checkbox"/>	1421	2	A9N61522 <input checked="" type="checkbox"/>	2932
3	1	A9N61503 <input checked="" type="checkbox"/>	1421	2	A9N61523 <input checked="" type="checkbox"/>	2932
4	1	A9N61504 <input checked="" type="checkbox"/>	1421	2	A9N61524 <input checked="" type="checkbox"/>	2932
5	1	A9N61505	1421	2	A9N61525	2932
6	1	A9N61506 <input checked="" type="checkbox"/>	1167	2	A9N61526 <input checked="" type="checkbox"/>	2386
10	1	A9N61508 <input checked="" type="checkbox"/>	1167	2	A9N61528 <input checked="" type="checkbox"/>	2386
16	1	A9N61511 <input checked="" type="checkbox"/>	1167	2	A9N61531 <input checked="" type="checkbox"/>	2386
20	1	A9N61512 <input checked="" type="checkbox"/>	1167	2	A9N61532 <input checked="" type="checkbox"/>	2386
25	1	A9N61513 <input checked="" type="checkbox"/>	1167	2	A9N61533 <input checked="" type="checkbox"/>	2386
32	1	A9N61515 <input checked="" type="checkbox"/>	1345	2	A9N61535 <input checked="" type="checkbox"/>	2386
40	1	A9N61517 <input checked="" type="checkbox"/>	1600	2	A9N61537 <input checked="" type="checkbox"/>	3518
50	1	A9N61518 <input checked="" type="checkbox"/>	1600	2	A9N61538 <input checked="" type="checkbox"/>	3518
63	1	A9N61519 <input checked="" type="checkbox"/>	1600	2	A9N61539 <input checked="" type="checkbox"/>	3518

Special application MCBs



Solar Application – PV DC

- DC MCB for multi string PV installations
- Operating Voltage: 800V DC
- Current Rating up to 25A
- Complies to IEC / EN 60947-2



Rail Application* (including Rolling Stock)

- Shock & vibration resistant (IEC 61373) – Cat 1, Class B
- Complies to EN 45545 HL2
- Complies to IEC / EN 60947-2



UL MCB

- Type: UL1077, UL489
- Breaking Capacity of 10kA
- Complies to IEC 60947-2 / UL1077 / UL489 / CSA

Note:

Please contact nearest Schneider Electric sales office or Customer Care for Reference and prices of Application Specific MCBs

*Rail Application RCDs are also available on demand **18mm/module

Residual Current Devices (RCDs) - For Human and Fire Protection



**30
mA**

Use of **30mA RCDs** is now **mandatory** for all **domestic intallations** in India (NEC 2023)



Schneider Electric provides voltage independent RCDs which work on current sensing technology and provide protection from residual current even at extra low voltages (down to zero volts) and in case of break of neutral.

**SI
Type**

Schneider Electric offers SI RCD built to operate in electrically polluted or installation in aggressive environments:

- Flourescent / Variable lighting with Electronic ballast
- Powerful IT / Telecom equipment / Air conditioning
- Severe Atmosphere - High lighting risk / Swimming pools

* for Measures relating to Safety and Electric supply

AC Residual Current Circuit Breakers - xID



- Complies to IEC/EN 61008-1 and IS 12640
- AC Type
- Selective range available for time based discrimination
- Easy Monitoring: Earth fault indication and Test Button on front face
- Operating temperature up to +70°C
- Mandatory to use OF-S auxiliary to add any indication or tripping auxiliary

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	2	A9N16201	5158	4	A9N16251	7240
	100	2	A9N16203	5725	4	A9N16253	7694
	300	2	A9N16202	5899	4	A9N16252	7921
40	30	2	A9N16204	6072	4	A9N16254	7127
	100	2	A9N16205	6546	4	A9N16255	7737
	300	2	A9N16206	6866	4	A9N16256	8035
63	30	2	A9N16208	7312	4	A9N16258	8253
	100	2	A9N16209	7863	4	A9N16259	9141
	300	2	A9N16210	8021	4	A9N16260	9183
80	30	2	A9N16212	12291	4	A9N16261	14558
	100	2	A9N16213	12496	4	A9N16262	14793
	300	2	-	-	4	A9N16263	14872

AC Residual Current Circuit Breakers (RCCBs) - ID



- Complies to IEC 61008-1
- AC Type
- Degree of pollution: 3 (suitable for industrial environment)
- Electrical ON/OFF indication by using OFSP auxiliary

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
4P	100	30	4	**A9R11491	On Request
		100	4	**A9R12491	On Request
	125	30	4	A9R11492	On Request
		100	4	A9R12492	On Request
		300	4	A9R14492	On Request

Note: **For 100A RCCB Auxiliary kindly contact Customer Care

AC Residual Current Breaker Overload (RCBO) - DPN N Vigi



- Complies to IEC/EN 61009
- AC Type Tripping characteristics - C curve
- Overvoltage category (IEC 60364): IV
- Suitable for indication & tripping auxiliaries

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
1P+N	6	30	2	A9N19661	7964
		300	2	A9N19681	8089
	10	30	2	A9N19663	7964
		300	2	A9N19683	8089
	16	30	2	A9N19665	7964
		300	2	A9N19685	8089
	20	30	2	A9N19666	7964
		300	2	A9N19686	8089
	25	30	2	A9N19667	7964
		300	2	A9N19687	8089
	32	30	2	A9N19668	7964
		300	2	A9N19688	8492
	40	30	2	A9N19669	10076
		300	2	A9N19689	10251

Note: Application specific RCDs also available with 10mA, 500mA and 1000mA sensitivities

Please contact nearest Schneider Electric Sales Office or Customer Care Center for Reference and Prices

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

SI Type Residual Current Circuit Breakers (RCCBs) - xID SI



- Complies to IEC/EN 61008-1
- SI RCCDs offer enhanced immunity against Electrical Disturbances; Polluted and Corrosive environments - Guaranteed performance in harsh operating conditions
- Ensures continuity of supply in networks with:
 - Transient overvoltages
 - Loads generating HF leakage current i.e. harmonics
 - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with:
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCCDs

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	2	A9N16234	12000	4	A9N16321	13374
40	30	2	A9N16237	12604	4	A9N16324	13796
63	30	2	A9N16240	12966	4	A9N16327	14165
63	300	2	A9N16246	13064	4	-	-

Vigi Block for xC60 (Add-on RCD Module, 2 & 4 Pole)



- Flexibility to use MCB of any tripping curve to suit applications, ensuring best 3 in 1 protection
- No auxiliary supply required
- AC Class protection
- Degree of pollution: 3 (suitable for industrial environment)
- Immune to nuisance tripping due to transient over voltages

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	1.5	A9N26581	9535	3	A9N26595	12032
	100	1.5	A9N26582	10495	3	A9N26596	10685
	300	1.5	A9N26583	11096	3	A9N26597	11500
63	30	2	A9N26611	11536	3.5	A9N26643	11579
	100	2	A9N26612	12217	3.5	A9N26644	12027
	300	2	-	-	3.5	A9N26645	12583

Note: Vigi Block for High Rating up to 125A (C120) and High Breaking Capacity (NG125) available on demand

SI Type Residual Current Breaker Overload (RCBO) - DPN N Vigi SI



- Complies to IEC/EN 61009
- Ensures continuity of supply in networks with:
 - Transient overvoltages
 - Loads generating HF leakage current i.e. harmonics
 - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with :
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCCDs

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
1P+N	6	30	2	A9N19631	15855
	10	30	2	A9N19632	15855
	16	30	2	A9N19634	15855
		300	2	A9N19644	15855
	25	30	2	A9N19636	15855
	32	30	2	A9N19637	15855
	40	30	2	A9N19638	18773
		300	2	A9N19648	20891

*For Prices, please contact nearest Schneider Electric Sales Office or Customer Care Center are Center for Reference and Prices

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Acti 9 Active AFDD

Make active safety your new standard

- Integrated arc fault protection for prevention against electrically ignited fires
- AFDD complies to IEC/EN 62606
- RCD complies to IEC/EN 61009-2-1
- Protection Against Series & Parallel Arc

Acti9 iCV40N VigiARC Active, 30 mA, A-SI type



- Ensures tripping on genuine earth fault in networks with :
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCDs
- Available in C Curve Configuration

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit LP [₹]
1P+N	6	30	2	A9TDNC606	On Request
	10	30	2	A9TDNC610	On Request
	16	30	2	A9TDNC616	On Request
	25	30	2	A9TDNC625	On Request
	32	30	2	A9TDNC632	On Request
	40	30	2	A9TDNC640	On Request

Acti9 iCV40H VigiARC Active, 30 mA, A-SI type




- Ensures tripping on genuine earth fault in networks with :
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCDs
- Available in C Curve Configuration
- Seamless connectivity with Wiser 2.0 & ecostruxre through Panel server

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit LP [₹]
1P+N	6	30	2	A9TDND606	On Request
	10	30	2	A9TDND610	On Request
	16	30	2	A9TDND616	On Request
	20	30	2	A9TDND620	On Request
	25	30	2	A9TDND625	On Request
	32	30	2	A9TDND632	On Request

Common Auxiliaries for xC60 / RCDs Range

- Field-fittable auxiliaries (clip fitted) mounted on left side with maximum width of 54mm
- Order: Tripping Auxiliaries (MN first) followed by Indication Auxiliaries (SD first)

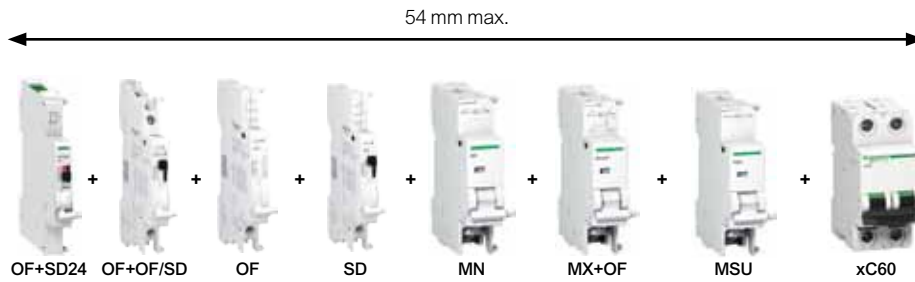

Type	Module Width 18mm/module	Reference	Unit MRP [₹]
Indication Auxiliaries			
Acti9 A9N iOF bottom wiring 0.1-6A aux	0.5	A9N26904	3413
Acti9 A9N SD bottom wiring 0.1-6A aux	0.5	A9N26907	1926
Acti9 A9N OF/SD+OF top/bt wir 0.1-6A aux	0.5	A9N26909	4905
Acti9 A9A iOF bottom wiring 0.1-6A aux	0.5	A9A26904	1701
Acti9 A9A iOF/SD+OF t&b wire 0.1-6A aux	0.5	A9A26909	5211
OF+SD24 auxiliary contact (ComReady)	0.5	A9N26899	4317
Protection Auxiliaries – Trip Indication on front face			
MN Under-voltage Release 220-240V AC		A9N26960	6937
MSU Over-voltage Release 275V AC	1	A9N26500	8214
Tripping Auxiliaries – Trip Indication on front face			
MX + OF Shunt Release 110-415V AC: for Remote tripping of Circuit Breaker	1	A9N26946	4512
MX + OF Shunt Release 12-24V AC/DC: for Remote tripping of Circuit Breaker		A9N26948	4512
Auxiliary Switch for RCCBs – Mandatory for use of Auxiliaries with RCCBs			
Auxiliary switch for RCCB up to 80A (OF-S)	0.5	A9N26923	7978
Auxiliary switch for RCCBs 125A (OFSP)	0.5	A9N16940	4052

Accessories



Type	Description	Reference	Unit MRP [₹]
Rotary Handle*	Breaker Switching Sub-Assembly	27046	7262
Rotary Handle*	Extended, Disconnectable handle	27047	3667
Padlock** (bag of 2)		26970	1551
Aluminum cable terminal**		27060	913
Spacer		A9N27062	361

* for xC60, C120, DPN N Vigi, C60H-DC, xSW - Multi poles only

Note:

For all above Reference MOQ = 1
Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Protection Against Lightning Strikes And Switching Surges



For all low voltage switchboards and electrical enclosures:

Comprehensive range

- To ensure the protection of equipment connected to:
- Low voltage networks,
- Telecommunications networks,
- Computer networks.
- Easy to implement and use.
- Compatibility with all earthing systems (TT, TNS, TNC, IT).
- Technical and aesthetic consistency

Continuity of service and certified safety

Schneider Electric certified coordination between the surge arrester and its disconnection circuit breaker.

Compliance with standards: IEC/EN 61643-11.



More and more electrical equipment today is sensitive to overvoltages caused by lightning.



90%

of power outlets supply equipment incorporating electronic devices.



iQuick PRD “built-in” technology surge arresters, a Schneider Electric innovation, incorporate their own disconnection circuit breaker: easy to choose and simple to install for greater effectiveness.



Up to **30%** of installation time saved.

Surge Arresters - Type 1+ 2



- Complies to EN/IEC 61643 -11
- Withdraw able type: Easy Replacement
- Inbuilt SPD health Indicator: Also available with remote signaling
- For protection against Direct lightning surge, Indirect lightning surge, Switching surge
- Imp up to 25kA & I_{max} upto 40kA
- **Always use a Back-up MCB with your SPD**
- Maximum Operating Voltage [U_c]: 350V

Type	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
PRD1 25r	1P	2	16329	24737
	1P + N	4	16330	44404
	3P	6	16331	69918
	3P + N	8	16332	86869

Surge Arresters iPRD - Type 2 (Withdrawable type) (TT, TN-S, TN-C Systems)



- Complies to IEC 61643-11/2011 T2 and EN 61643-11
- For protection against Indirect lightning surge and Switching surge
- Inbuilt health Indicator
- Response time < 25ns
- I_{max} (8/20 s): 65/40/15/8kA
- Maximum Operating Voltage [U_c]: 340V
- Level of protection, U_p: 1.0 - 2.0 kV
- Remote indication contact with 8r/20r/40r/65r
- **Always use a Back-up MCB with your SPD**

Type	Rated Voltage (V)	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
iPRD8	230	1P	1	A9L08100	6060
	230	1P+N	2	A9L08500	11559
	230/400	3P	3	A9L08300	15601
	230/400	3P+N	4	A9L08600	23548
iPRD8r	230	1P+N	2	A9L08501	13857
	230/400	3P+N	4	A9L08601	28258
iPRD20	230	1P	1	A9L20100	6792
	230	1P+N	2	A9L20500	14530
	230/400	3P	3	A9L20300	18600
iPRD20r	230/400	3P+N	4	A9L20600	26297
	230	1P+N	2	A9L20501	17023
	230/400	3P+N	4	A9L20601	32156
iPRD40	230	1P	1	A9L40100	8432
	230	1P+N	2	A9L40500	16735
	230/400	3P	3	A9L40300	24021
iPRD40r	230/400	3P+N	4	A9L40600	33496
	230	1P	1	A9L40101	9441
	230	1P+N	2	A9L40501	21574
iPRD65r	230/400	3P	3	A9L40301	32327
	230/400	3P+N	4	A9L40601	40202
	230	1P	1	A9L65101	12621
iPRD65r	230	1P+N	2	A9L65501	27496
	230/400	3P	3	A9L65301	35881
	230/400	3P+N	4	A9L65601	46557

Spare Cartridges for iPRD



- Spare Cartridges for iPRD8r, iPRD20r, iPRD40r and iPRD65r
- End of life indication available on front face
- These Cartridges are not compatible with Old SPD range (A9L16...)**

Type	Spare Cartridges for	Reference	Unit MRP [₹]
iPRD 65-350	iPRD65r	A9L65102	7901
iPRD 40-350	iPRD40, iPRD40r	A9L40102	6383
iPRD 20-350	iPRD20, iPRD20r	A9L20102	4872
iPRD Neutral	All products (1P+N, 3P+N)	A9L00002	6524

**Spare Cartridges for Old SPD Range (A9L16...) are available on demand - please contact nearest Schneider Electric Sales Office or Customer Care for Reference and prices

Note:

For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

iQuick PRD - Type 2 with inbuilt MCB



- Compact SPD with in-built back up MCB - saving on space, MCB selection, wiring time
- Complies to EN/IEC 61643-11
- Withdrawable Type - Cost Efficient - Allows damaged Cartridges to be replaced without having to replace entire SPD
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available
- Incoming Protection: iQuick PRD 40r (High Risk level) and iQuick PRD 20r (Moderate Risk level)
- Secondary Protection: iQuick PRD 8r is cascade mounted with incoming surge arresters

Type	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
iQuick PRD 8r	1P+N	4	A9L16298	17406
	3P	6.5	A9L16299	28149
	3P+N	7.5	A9L16300	35026
iQuick PRD 20r	1P+N	4	A9L16295	21461
	3P	6.5	A9L16296	33792
	3P+N	7.5	A9L16297	42032
Quick PRD 40r	1P+N	4	A9L16292	26843
	3P	6.5	A9L16293	40215
	3P+N	7.5	A9L16294	49979

Note: Spare / Replacement Cartridges available - For Reference and prices contact nearest sales office or customer care

Photovoltaic Surge Arresters



- Protection for photovoltaic panels and the DC input to the inverter from overvoltages due to a lightning strike
- Type 2 surge arresters
- Should be installed in switchboard inside the building. If switchboard is located outside, it must be weatherproof
- Withdrawable surge arrester allows damaged Cartridges to be replaced quickly
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available

Type	U (cpv) Maximum Operating Voltage (V)	Module Width 18mm/module	Reference	Unit MRP [₹]
iPRD 40r	800	3	A9L40271	13235
	1000	3	A9L40281	16200

Note: Spare / Replacement Cartridges available - For Reference and prices contact nearest sales office or customer care

Surge Arresters for Communication Networks



- Analogue telephone line protection: iPRC surge arrester wired in series to the private installation input, protects the telephones, the modems (including ADSL) etc
- Protection for 2 low-current lines without common potential or 4 lines with common reference potential
- iPRI protects measuring instrument and PLC sensor inputs and the DC power supply inputs up to 53 V and AC power supply inputs up to 37 V

Type	[Ue] Operational Voltage (V)	Module Width 18mm/module	Reference	Unit MRP [₹]
PRI	48 V DC	1	A9L16339	23606
PRC	130 V AC	1	A9L16337	14152

Note:

For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Isolator - xSW



- Complies to IEC/EN 60947-3
- Switching duty: AC - 22A
- Impulse Voltage
 - Upto 80 - 4kV
 - 100 & 125A - 6kV
- Rated short-time withstand current (Icw)
 - Upto 80A - 12.5In
 - 100 & 125A - 12 In for 1s

Poles Description	[In] Rated Current (A)	Module Width 18mm/module	MOQ	Reference	Unit MRP [₹]
2	40	2	6	A9S2P040	999
	63	2	6	A9S2P063	1320
3	40	3	4	A9S3P040	1745
	63	3	4	A9S3P063	2044
4	40	4	3	A9S4P040	2209
	63	4	3	A9S4P063	2406
	100	4	3	A9S4P100	4025
	125	4	3	A9S4P125	4448

Selector Switch - iSSW



- Complies to IEC 60947-5-1 and IEC 60669-1
- Rating 20A, 250V AC
- Electrical life (AC22): 30,000 cycles
- Connection: tunnel terminals cables up to 10 sq. mm

No. of positions	Poles Description	Contacts	Module Width 18mm/module	MOQ	Reference	Unit MRP [₹]
2	1	1 C/O	1	12	A9E18070	2137
	2	2 C/O	2	6	A9E18071	2938
	2	1NO + 1NC	1	12	A9E18072	1713
3	1	1 C/O	1	12	A9E18073	1961
	2	2 C/O	2	6	A9E18074	3545

iRO Buzzers



- Audible indication in housing and the tertiary sector
- Sound level of 70dBA at a distance of 60cm

Voltage	Module Width 18mm/module	Reference	Unit MRP [₹]
230V AC	1	A9A15322	2641

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

ICT Contactors



Suitable for
ComReady
Auxiliary



- Complies to IEC 1095, E N 61095
- 4 operating modes switch on front face :
 - Automatic mode
 - Temporary "ON" mode
 - Permanent "ON" mode
 - Shutdown
- Mechanical contact position Indicator
- Safe installation maintenance: lock the contactor in ON position
- Silent operation (20dB) for entire range

Type	Rating (A)	No. of Contacts	Module Width 18mm/module	Reference	Unit MRP [₹]
1P	25	1NO	1	A9C20731	3164
	16	2NO	1	A9C22712	3256
2P	25	2NO	1	A9C20732	3967
	40	2NO	2	A9C20842	8383
	63	2NO	2	A9C20862	8511
3P	25	3NO	2	A9C20833	5017
	40	3NO	2	A9C20843	11137
	63	3NO	3	A9C20863	12104
4P	25	4NO	2	A9C20834	5253
	40	4NO	2	A9C20844	12972
	63	4NO	3	A9C20864	13686
	63	2NO + 2NC	3	A9C20868	15820

Note: 100A Contactor in 2P / 4P - available on request

iTL Impulse Relays



Suitable for
ComReady
Auxiliary



- Complies to IEC/EN 60669-2-2
- Safe maintenance: disconnection of remote control by selector switch
- Manual Controls on front face: 0-I toggle
- Mechanical contact position Indicator
- Maximum 5 operations/min. and 100 switching operations/day
- Degree of pollution: 3 (suitable for industrial environment)

Type	Rating (A)	Control Voltage	No. of Contacts	Module Width	Reference	Unit MRP [₹]
1P	16	230-240 VAC	1NO	1	A9C30811	2129
	32	230-240 VAC	1NO	1	A9C30831	2680
2P	16	230-240 VAC	2NO	1	A9C30812	3364
	32	230-240 VAC	2NO	1	A9C30831 + A9C32836	7746
3P	16	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30811 + A9C32816	6193
	32	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30831 + 2 x A9C32836	12812
4P	16	230-240 VAC	4NO	2	A9C30814	6503
	32	230-240 VAC	4NO	2	A9C30831 + 3 x A9C32836	17878

iIL Indicator Lights



- Complies to IEC 60947-5-1
- Indicator light with LED technology
- Service life 100,000 hours with constant luminous efficiency

Type	Colour	Module Width 18mm/module	Reference	Unit MRP [₹]
Single Indicator light	Red	1	A9E18320	2121
	Green	1	A9E18321	2121
	Blue	1	A9E18323	2121
	Orange	1	A9E18324	2121
3 phase voltage presence light	Red/Red/Red	1	A9E18327	6243
Single Push Button (1 NO+ 1NC)	Grey	1	A9E18033	2830

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Communication Auxiliaries



Auxiliary for Protection Devices (OF+SD24)

Auxiliary for Contactors (iACT24)

Auxiliary for Impulse Relays (iATL24)

Description	Module Width	Reference	Unit MRP [₹]
OF+SD24	0.5	A9N26899	4317
iACT24	1	A9C15924	27914
iATL24	1	A9C15424	20910

Reflex iC60 - Integrated Control & Overcurrent Protection Device



- All in One Solution: MCB + Contactor + Impulse Relay + Auxiliary
- 10kA Breaking capacity as per IEC/EN 60947-2
- Ti24 interface: Connection to PLC, Smartlink
- 3 operating modes to cater to a variety of applications
- Safe lock down with Integrated Padlocking
- Simplified maintenance: Front face Indicator allows better reliability

[In] Rated Current (A)	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width **	4.5 mod		5.5 mod		6.5 mod	
B Curve						
10	A9C61210	54628	-	-	-	-
C Curve						
10	A9C62210	58003	A9C62310	62122	-	-
16	A9C62216	58003	A9C62316	59976	A9C62416	62411
25	A9C62225	55233	A9C62325	58794	-	-
40	A9C62240	58174	-	-	A9C62440	68231
63	-	-	-	-	A9C62463	70007

Note: **18mm/module

Please contact Customer Care Center for Stockable and Non stockable status of references.


NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Isobar Distribution System

EcoStruxure™ Innovation At Every Level

From sensors to services, our Innovation At Every Level approach improves energy and operational efficiency by tapping the true business value of IoT advancements. We've made mobility, sensing, cloud, analytics, and cyber security technologies meaningful to customers, helping them compete in our IoT economy.



70% of decision-makers see the business value of IoT*

*Schneider Electric IoT 2020 Business Report

Connected Products:


The Internet of Things starts with the best things. Our IoT-enabled best-in-class connected products include breakers, drives, UPSs, relays, sensors, and more. Devices with embedded intelligence drive better decision-making throughout operations.

Edge Control:

Mission-critical scenarios can be unpredictable, so control of devices at the edge of the IoT network is a must. This essential capability provides real-time solutions that enable local control at the edge, protecting safety and uptime.

Applications, Analytics, and Services:

Interoperability is imperative to supporting the diverse hardware and systems in building, data center, industry, and Infrastructure end markets. EcoStruxure™ enables a breadth of agnostic applications, analytics, and services for seamless enterprise integration.

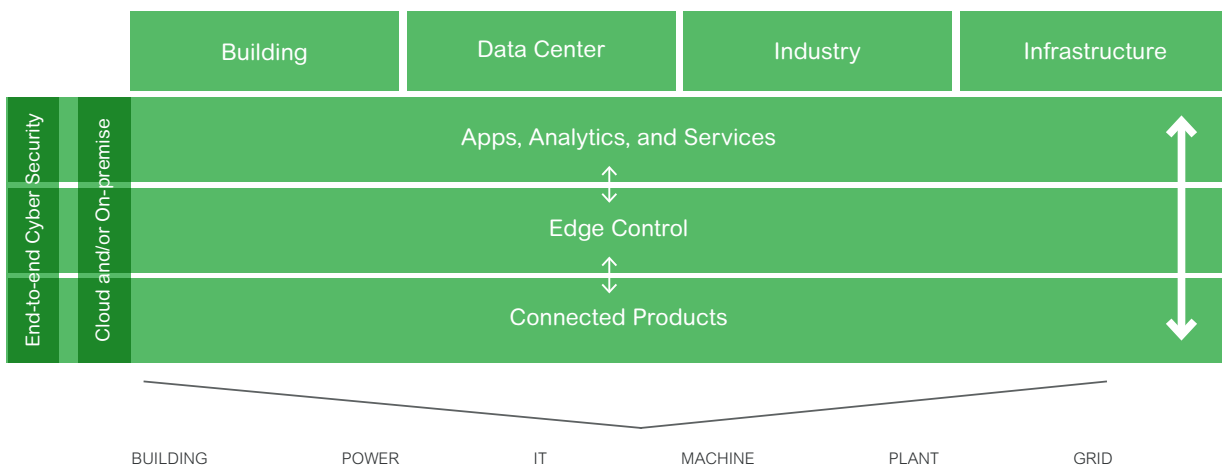

Connectivity built in

Acti9 Isobar harnesses the connectivity of the Acti9 range enabling distribution boards to become smart and connected.



1. **Enable asset management** on all outgoing ways with **PowerTag**



2. **Smartlink SiD** for wireless data concentration



3. **Enable further asset and energy management** through PowerTag for Compact NSX



4. **Monitor and control** your assets with SiB Smartlink




5. See the power and optimise the use of your assets with Facility Expert our **simple on-line services platform**



Acti 9

Isobar Pan Assembly

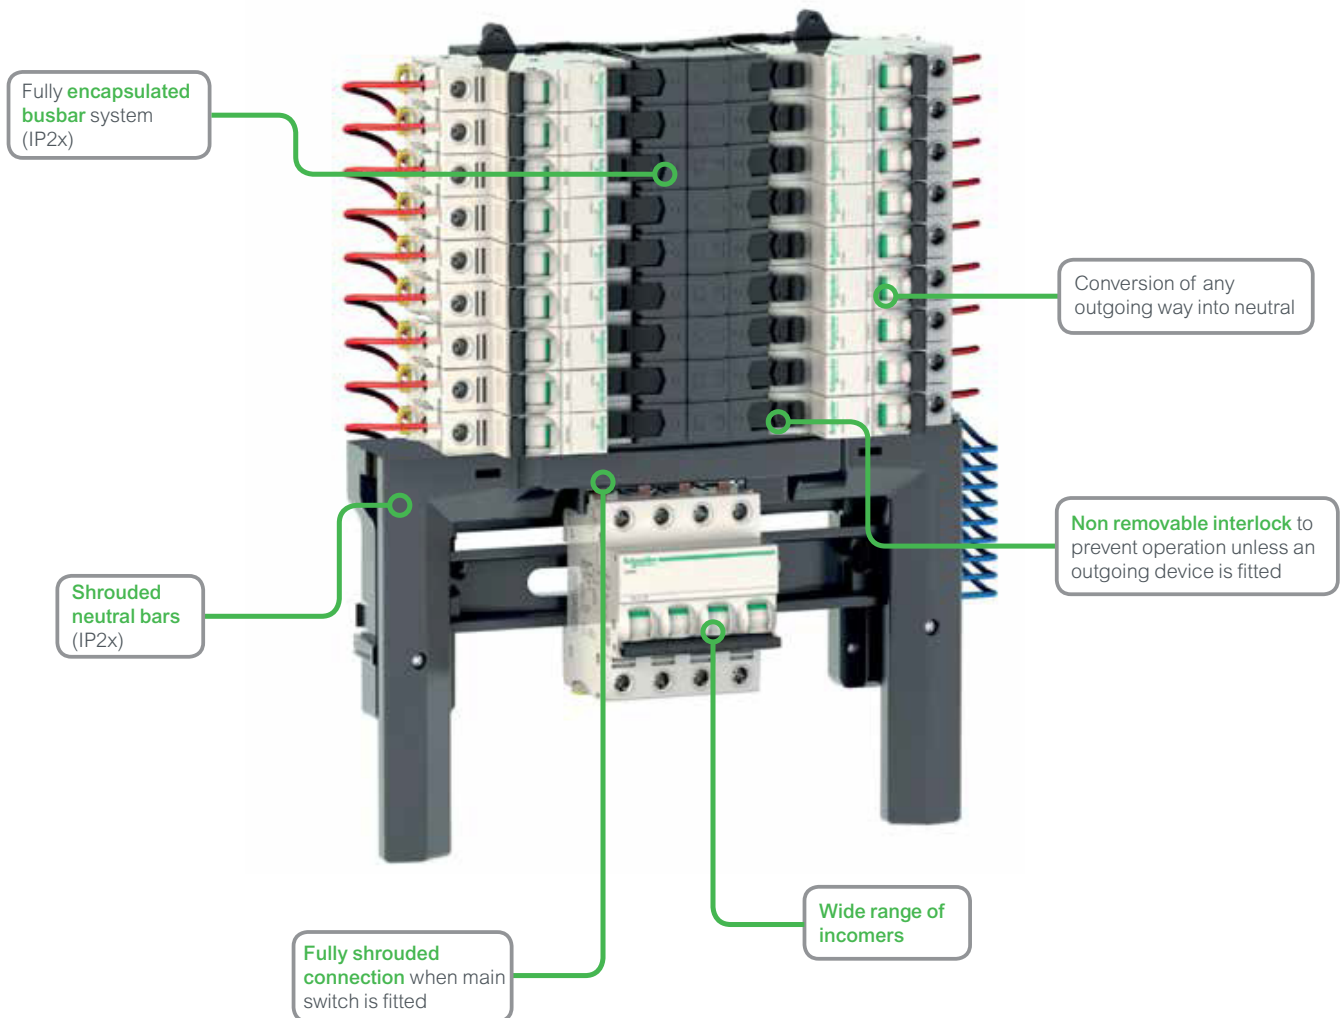

- Fully type tested conditional short circuit rating of 25kA to BS EN 61439-3
- 250A busbar rating
- Range of incomers: switch disconnectors, residual current devices, terminal blocks, MCCB
- Full range of device accessories and auxiliaries
- Shrouded Neutral
- Isobar disconnection conforms to BS/EN 60947-3 ensuring complete isolation for unused poles Option to switch any outgoing to neutral using distributed neutral kit

Description	Double Door Metal (IP43) Reference	Unit LP [₹]
Acti9 Isobar B - pan assembly - 16 ways TP + earth + neutral	SEA9BN16PEV	On Request
Acti9 Isobar B - pan assembly - 18 ways TP + earth + neutral	SEA9BN18PEV	On Request
Acti9 Isobar B - pan assembly - 24 ways TP + earth + neutral	SEA9BN24PEV	On Request
Acti 9 - 1P blank terminal block (no electrical connection)	SEA9BP	On Request
Isobar B - neutral bar - 1N - for distribution board - 16 ways	SEA9NB16	On Request
Isobar B - neutral bar - 1N - for distribution board - 18 ways	SEA9NB18	On Request
Isobar B - neutral bar - 1N - for distribution board - 24 ways	SEA9NB24	On Request
Isobar A - neutral bar - 1N - for distribution board - 4 ways SP+N	SEA9NKIT	On Request
Acti 9 - terminal block - 250A	SEA9NPB250TB	On Request
Acti 9 Isobar B - MCCB/Interpact connection kit	SEA9BINCKIT	On Request

*Price on Request

Please contact Schneider Electric Customer Care Center for Prices

Acti 9

Distribution Boards

Spectacular Design

Blends seamlessly with interiors



Unique Rounded Corners | Color - RAL 9003 white | Designer Rotary Knob

Maximized Wiring Space

Convenient and Safe wiring



Side mounted N-bar and E-bar




Removed all injurious sharp corners



15% more wiring area | Reduced U-box Collar | Removable Frame, Centre plate & Gland plate

Adaptable

Total Flexibility for ease of installation and usage

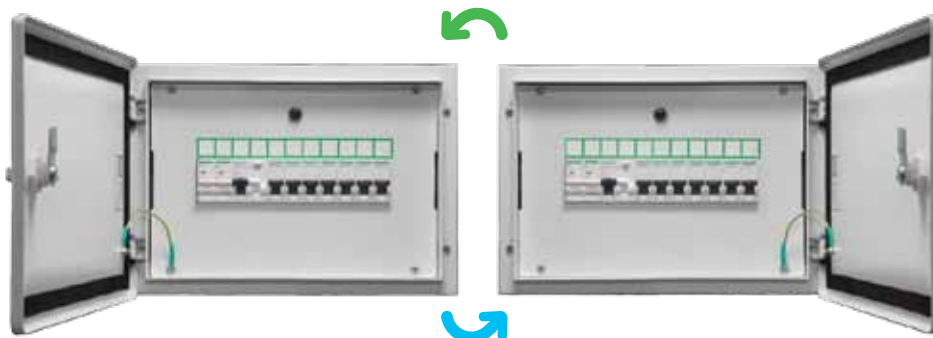

Unique 5 holes mounting with positioning hole



Surface and Flush installation | Field fittable key lock provision | Reversible Door

Robust Architecture


Perfect blend of Strength & Weight



High Strength-to-Weight ratio | RoHS and REACH Compliance – ideal solution for GREEN Buildings

Base Material used - Galvanized Iron

4X Rust Resistance



1. Powder Coating
- 2. Galvanized Iron**
3. Base Iron

Galvanized Iron | Gives 4X rust resistance
No Rusting | Even if the powder coating is scratched
No Propagation Of Rust | Even If base material is chipped off
No Hassle | of repainting due to rusting

Inspiring the **S.M.A.R.T.** choice!!!

Technically Proven

Safety Guaranteed



Designed and Manufactured as per **IS 8623 - 1 & 3** | IP and IK test by ERDA & CPRI | Glow wire tested

Type Tested as per IEC 61439 - 1 & 3



IEC 61439 - 3* Fully Compliant

*Tested at **NABL** and **ASTA** accredited testing facility



Salt Spray



IP43



IK09



Reliable Door



Earthing



Temp@
Max Curr



Mechanical Tests

Electrical Tests

W.E.F. January 15th, 2026

Acti 9

Distribution Boards

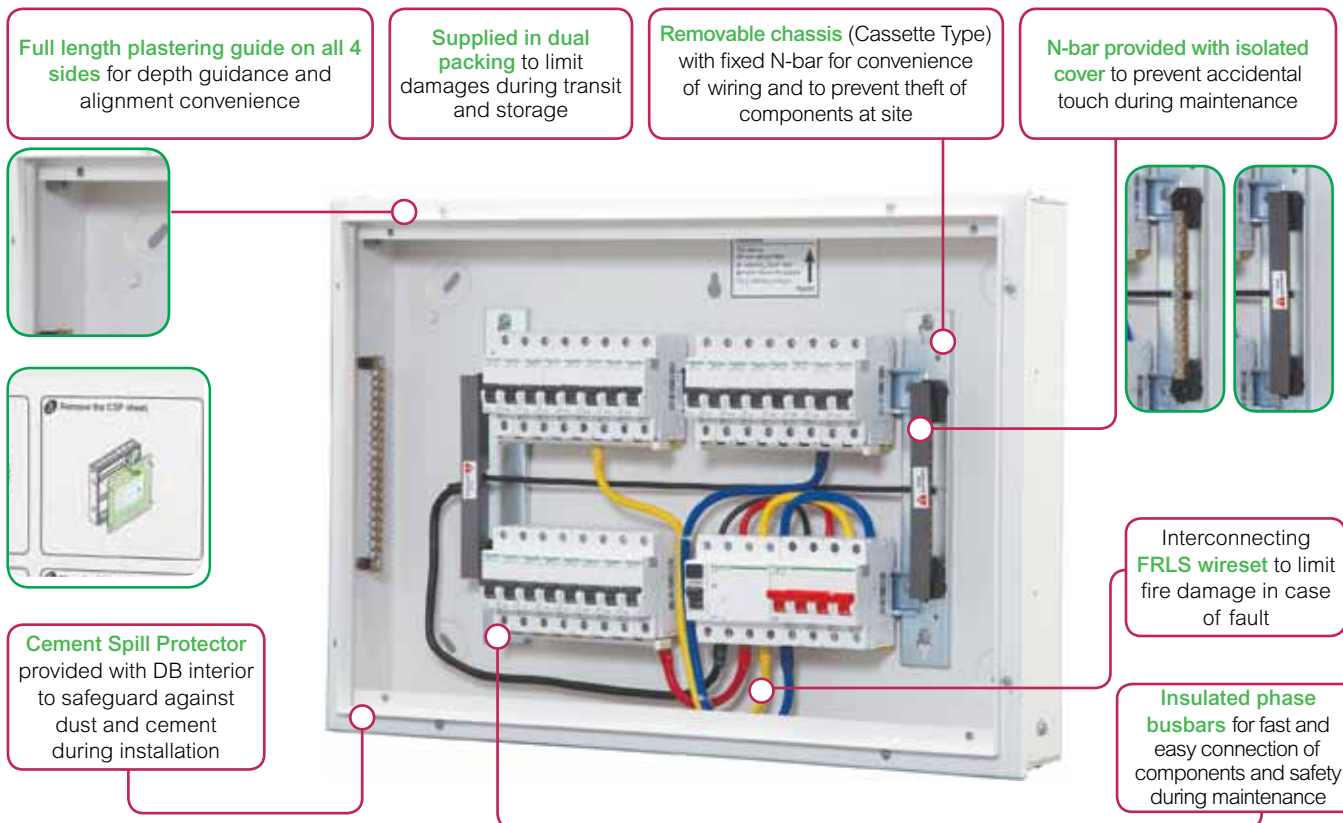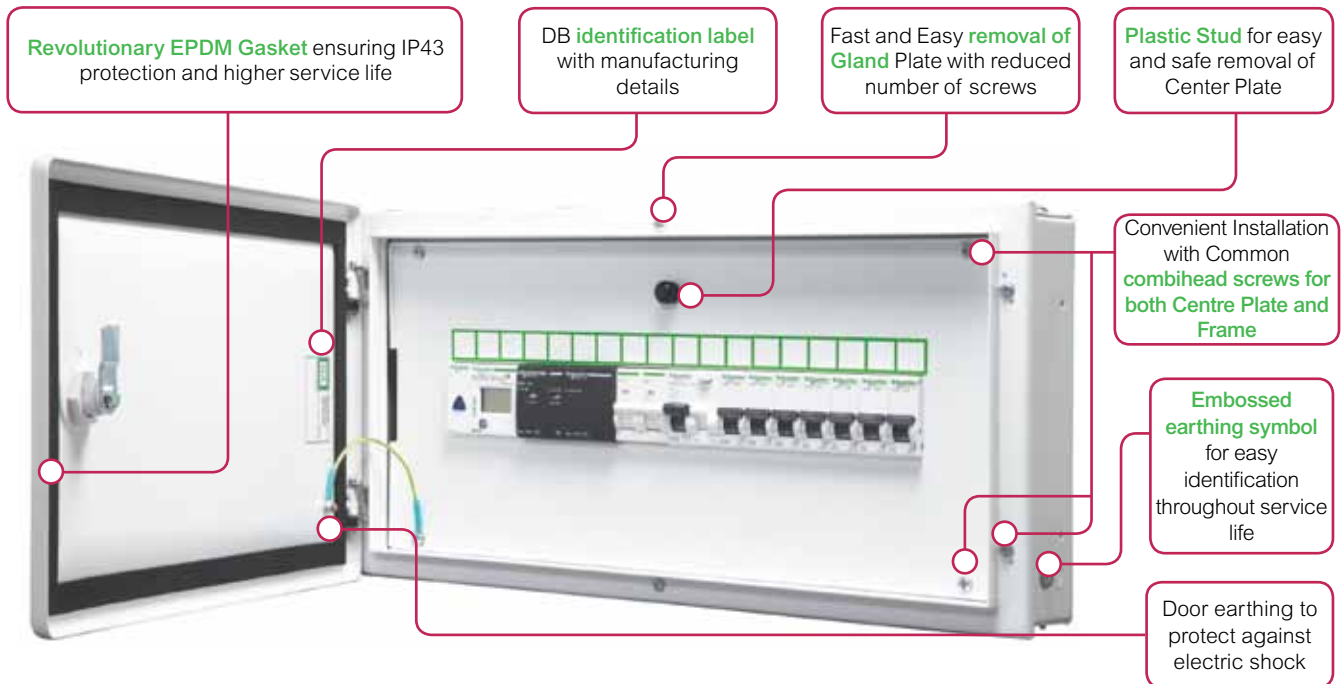

Metal Enclosures



- Metal Enclosure to mount individual Modular Device feeding directly to the load or final distribution board

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]
2 way	1 / 2	A9HMES02 <input checked="" type="checkbox"/>	1152
4 way	3 / 4	A9HMES04 <input checked="" type="checkbox"/>	1152

SPN DBs



- SPN DB for distribution of Single Phase Neutral supply to respective load MCBs
- Incomer - DP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
6 way	6	A9HSNS06	2231	A9HSND06 <input checked="" type="checkbox"/>	3205
8 way	8	A9HSNS08 <input checked="" type="checkbox"/>	2646	A9HSND08 <input checked="" type="checkbox"/>	3493
12 way	12	A9HSNS12	3131	A9HSND12 <input checked="" type="checkbox"/>	4201
18 way	18	-	-	A9HSND18 <input checked="" type="checkbox"/>	5628

TPN DBs



- Standard TPN DBs for distribution of Three Phase and Neutral supply
- Incomer - FP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
4 way eco	4 + 12	-	-	A9HTND04E <input checked="" type="checkbox"/>	8362
4 way	8 + 12	-	-	A9HTND04 <input checked="" type="checkbox"/>	8434
6 way	8 + 18	-	-	A9HTND06 <input checked="" type="checkbox"/>	8560
8 way	8 + 24	-	-	A9HTND08 <input checked="" type="checkbox"/>	10555
12 way	8 + 36	-	-	A9HTND12 <input checked="" type="checkbox"/>	16114

Flexi Tier DBs



- Flexi DBs give total flexibility to mount any type and size of Modular devices as per load requirement
- Provided with N-Bar and E-Bar
- Flexi Tier DBs can be converted to PPI DB using 'PPI Kit' provided on next page

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
2 Tier 24 Modules	2 x 12	-	-	A9HFD224	9038
3 Tier 36 Modules	3 x 12	-	-	A9HFD336	10855
4 Tier 40 Modules	4 x 10	-	-	A9HFD440 <input checked="" type="checkbox"/>	11468
4 Tier 56 Modules	4 x 14	-	-	A9HFD456 <input checked="" type="checkbox"/>	11986

Note:

For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.


NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Acti 9

Distribution Boards

New Phase Segregated DBs

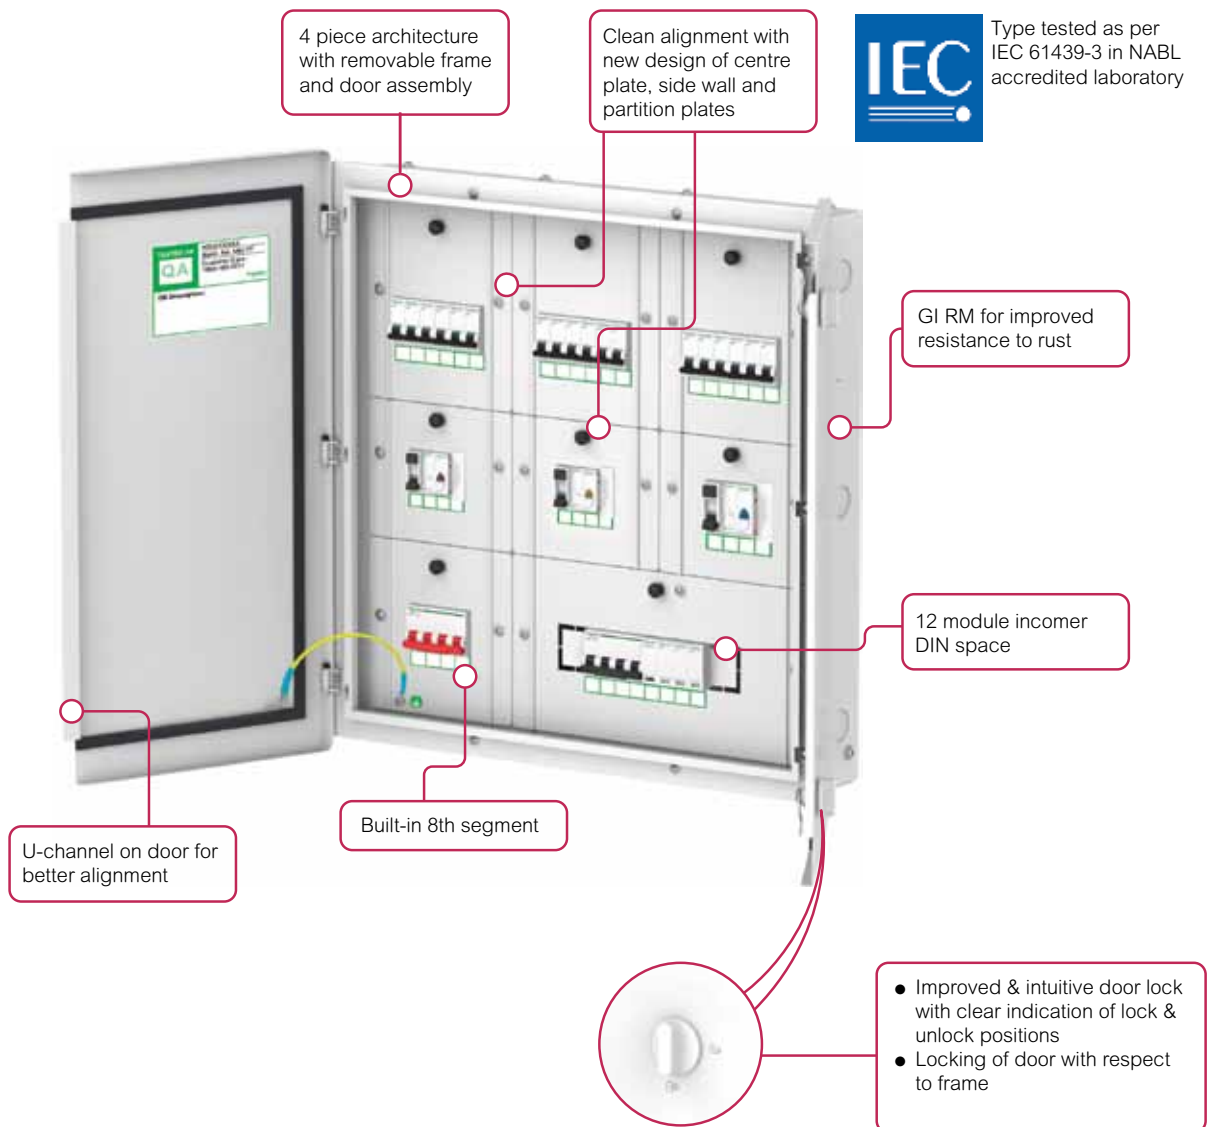

Key highlights

- 1 New compact design
- 2 Robust architecture
- 3 Type-tested system
- 4 4 piece construction
- 5 Built-in 8th segment
- 6 Split door for all variants
- 7 Clean alignment of doors, centerplates
- 8 Improved door locking
- 9 High rust resistance with GI
- 10 Increased incomer DIN space

Per Phase Isolation DBs

- PPI DBs to mount DP Residual Current Device (RCD) at an individual phase level to isolate the faulty phase in case of earth leakage and ensure continuity of supply to other healthy phases
- Incomer - Modular (FP MCB/Isolator) MCCB100A (TP/FP Compact NSX or EasyPact CVS)
- Sub-Incomer - DP RCCB/RCBO
- Outgoing - SP MCBs

PPI TPN DB



Description	Total Module Cutout (no. of rows x No. of modules per row)	Double Door Metal (IP43)	No of Ways	Unit MRP [₹]
6 Way TPN PPI DB	8 + 2 x 3 + 4 x 3	A9HTPI06	6 Ways	11132
8 Way TPN PPI DB	8 + 2 x 3 + 6 x 3	A9HTPI08	8 Ways	12912
12 Way TPN PPI DB	8 + 2 x 3 + 10 x 3	A9HTPI12	12 Ways	17764

PPI Flexi Tier DB

Description	Total Module Cutout (no. of rows x No. of modules per row)	Double Door Metal (IP43)	No of Ways	Unit MRP [₹]
4T40M Flexi PPI DB	4 x 10	A9HFP110	10	17238
4T56M Flexi PPI DB	4 x 14	A9HFP114	14	19409

Phase Segregated DBs



- Phase Segregated DBs to provide total safety for installer and maintenance personnel, by compartmentalizing each Phase and separating Incomer, Sub-Incomer and Outgoing
- Offers better continuity of supply in case of faults during maintenance at DB level.
- Incomer - Modular (FP MCB/Isolator) / MCCB 100A (TP/FP during maintenance Compact NSX or EasyPact CVS)
- Sub-Incomer - DP RCCB/RCBO
- Outgoing - SP MCBs
- GI sheet ensures improved rust resistance
- Type-tested system conforming IEC 61439-3
- Built-in 8th segment (for modular incomer only)
- Increased incomer DIN space of 12M for 6 ways to 12 ways
- Split door for all variants
- New design ensures clean alignment of doors, centerplates
- 4 piece architecture with removable frame
- Improved, intuitive door lock design with clear indication of lock and unlock positions

Description	Total Module Cutout (Additional segment + Incomer + Sub-incomer + Outgoing)	Double Door Metal (IP43) Reference	Unit MRP [₹]
4 way	4 + 8 + (3*4) + (3*4)	A9HPSG04	16789
6 way	4 + 12 + (3*4) + (3*6)	A9HPSG06	18772
8 way	4 + 12 + (3*4) + (3*8)	A9HPSG08	20961
12 way	4 + 12 + (3*4) + (3*12)	A9HPSG12	26312
12 way with MCCB I/c	0 + 100A MCCB + (3*4) + (3*12)	A9HPSG12M	35505

Note:

For all above Reference MOQ = 1
Please contact Customer Care Center for Stockable and Non stockable status of references.

VTPN DBs for Modular Incomer



- Ideal solution to distribute power supply to both 3 Phase and 1 Phase loads in the same DB
- Incomer - FP RCCB / RCBO / Isolator / MCB
- Outgoing - SP MCBs / TP MCBs
- 65% more Incomer Wiring Space.
- New Compact Fishbone with better Thermal Performance
- Short Circuit Withstand – 17 kA for 250mS (100 A)/ 25 kA (250 A) for 500mS
- Secure Connections with Fixed Spreader links
- IP 2X protection at Incomer with new shrouds
- Type tested as per IEC 61439 – 3 in NABL accredited Lab
- Knockout size for Incomer increased to 50mm (to accommodate Aluminium Cable)

Description	Total Module Cutout (Incomer + Outgoing)	Double Door Metal (IP43) Reference	No of Ways	Unit MRP [₹]
Acti9 VTPN DB 4 Ways Modular i-c 63A	12 + 12	A9HVM04	4 Ways	16336
Acti9 VTPN DB 8 Ways Modular i-c 63A	12 + 24	A9HVM08	8 Ways	20789
Acti9 VTPN DB 12 Ways Modular i-c 63A	12 + 36	A9HVM12	12 Ways	27811

VTPN DBs for MCCB Incomer



- DBs for higher incoming current distribution up to 250A
- Incomer - TP/FP Compact NSX or EasyPact CVS MCCB up to 250A
- Outgoing - SP MCBs / TP MCBs
- 65% more Incomer Wiring Space.
- New Compact Fishbone with better Thermal Performance
- Short Circuit Withstand – 17 kA for 250mS (100 A)/ 25 kA (250 A) for 500mS
- Secure Connections with Fixed Spreader links
- IP 2X protection at Incomer with new shrouds
- Type tested as per IEC 61439 – 3 in NABL accredited Lab
- Knockout size for Incomer increased to 50mm (to accommodate Aluminium Cable)

Description	Total Module Cutout (Incomer + Outgoing)	Double Door Metal (IP43) Reference	No of Ways	Unit MRP [₹]
Acti9 VTPN DB 4 Ways MCCB i-c 100A	100 A MCCB + 12	A9HVN04L	4 Ways	17889
Acti9 VTPN DB 4 Ways MCCB i-c 160A	160 A MCCB + 12	A9HVN04M	4 Ways	19695
Acti9 VTPN DB 8 Ways MCCB i-c 100A	100 A MCCB + 24	A9HVN08L	8 Ways	22673
Acti9 VTPN DB 8 Ways MCCB i-c 160A	160 A MCCB + 24	A9HVN08M	8 Ways	24535
Acti9 VTPN DB 8 Ways MCCB i-c 250A	250 A MCCB + 24	A9HVN08H	8 Ways	31453
Acti9 VTPN DB 12 Ways MCCB i-c 100A	100 A MCCB + 36	A9HVN12L	12 Ways	30140
Acti9 VTPN DB 12 Ways MCCB i-c 160A	160 A MCCB + 36	A9HVN12M	12 Ways	32742
Acti9 VTPN DB 12 Ways MCCB i-c 250A	250 A MCCB + 36	A9HVN12H	12 Ways	37207

Mivan Compatible DB

SPN DBs

Description	Total Module Cutout (Incomer + Outgoing)	Double Door Metal (IP43) Reference	No of Ways	Unit MRP [₹]
Acti9 DB 6 way SPN DD 1.6mm	2 + 4	A9HSND06Z	6 Ways	On Request
Acti9 DB 8 way SPN DD 1.6mm	2 + 6	A9HSND08Z	8 Ways	On Request
Acti9 DB 12 way SPN DD 1.6mm	2 + 10	A9HSND12Z	12 Ways	On Request
Acti9 DB 18 way SPN DD 1.6mm	2 + 16	A9HSND18Z	18 Ways	On Request

TPN DBs

Description	Total Module Cutout (Incomer + Outgoing)	Double Door Metal (IP43) Reference	No of Ways	Unit MRP [₹]
Acti9 DB 4 way TPN DD 1.6mm	8 + 4 x 3	A9HTND04Z	4 Ways	On Request
Acti9 DB 6 way TPN DD 1.6mm	8 + 6 x 3	A9HTND06Z	6 Ways	On Request
Acti9 DB 8 way TPN DD 1.6mm	8 + 8 x 3	A9HTND08Z	8 Ways	On Request
Acti9 DB 12 way TPN DD 1.6mm	8 + 12 x 3	A9HTND12Z	12 Ways	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Phase Segregated DBs (Mivan Compatible)

Description	Total Module Cutout (Additional segment + Incomer + Sub-incomer + Outgoing)	Double Door Metal (IP43) Reference	No of Ways	Unit MRP [₹]
Acti9 DB 4 way PSG DD 1.6mm	4 + 8 + (3*4) + (3*4)	A9HPSG04Z	4 ways	On Request
Acti9 DB 6 way PSG DD 1.6mm	4 + 12 + (3*4) + (3*6)	A9HPSG06Z	6 ways	On Request
Acti9 DB 8 way PSG DD 1.6mm	4 + 12 + (3*4) + (3*8)	A9HPSG08Z	8 ways	On Request
Acti9 DB 12 way PSG DD 1.6mm	4 + 12 + (3*4) + (3*12)	A9HPSG12Z	12 ways	On Request

Flexi Tier DBs (Mivan Compatible)

Description	Total Module Cutout (no. of rows x No. of modules per row)	Double Door Metal (IP43) Reference	No of Modules Per Row	Unit MRP [₹]
4 Tier 40 Modules	4 x 10	A9HFD440Z	10	On Request
4 Tier 56 Modules	4 x 14	A9HFD456Z	14	On Request

TV TEL DB

Description	Double Door Metal (IP30) Reference	Unit MRP [₹]
Acti9 DB TVTEL BOX 1mm IP30	A9HTVTEL	On Request
Acti9 DB TVTEL & ONT BOX 1.2MM IP30	A9HOTVTEL	On Request

Note: For all above Reference MOQ = 1

Metal Clad P&S Units

- Plug & Socket Unit with Electra Plug & Socket and provision to mount modular protection devices to feed the end load directly

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]
10A 1P+N+E P&S	2	A9HMS210	2932
20A 1P+N+E P&S	2	A9HMS220	3137
30A 3P+E P&S	3	A9HMS330	6868

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Industrial P&S Units (provision to mount PratiKa Sockets)




- Plug & Socket Unit with provision to mount PratiKa straight / angled* socket and modular protection devices to feed the end load directly

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]
16A 3P PK P&S	2	A9HKS316	2711
32A 3P PK P&S	2	A9HKS332	4478
32A 5P PK P&S	4	A9HKS532	5303
63A 5P PK P&S	4	A9HKS563	10708

Locks for Acti 9 DBs

Key Lock*



Lock & Unlock symbol on door for easy & intuitive operation

Description	Reference	Unit MRP [₹]
New Rotary Lock**	A9HRL901	873
New Key Lock**	A9HRL902	813

Note: **Use New Rotary lock reference A9HRL901 for:
Acti9 DBs manufactured September 2020 onwards
Acti9 DBs with lock & unlock symbol on door.

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15th, 2026

Accessories for Distribution Boards

Wire Way Box for Double Door IP43 DBs

Description	Reference	Unit MRP [₹]
Wire way box for A9HSND06	A9HSND06WB	2158
Wire way box for A9HSND08	A9HSND08WB	2608
Wire way box for A9HSND12	A9HSND12WB	2908
Wire way box for A9HSND18	A9HSND18WB	4153
Wire way BOX FOR A9HTND04E	A9HTND04EWB	2997
Wire way box for A9HTND04	A9HTND04WB	3314
Wire way box for A9HTND06	A9HTND06WB	3514
Wire way box for A9HTND08	A9HTND08WB	4153
Wire way box for A9HTND12	A9HTND12WB	4851
Wire way BOX FOR A9HFD224	A9HFD224WB	3090
Wire way BOX FOR A9HFD336	A9HFD336WB	3059
Wire way BOX FOR A9HFD440	A9HFD440WB	2957
Wire way BOX FOR A9HFD456	A9HFD456WB	3314
WWB Acti9 PSG DB 8 Seg 4 Ways MCB i/c	A9HPSG04WWB	4275
WWB Acti9 PSG DB 8 Seg 6 Ways MCB i/c	A9HPSG06WWB	5002
WWB Acti9 PSG DB 8 Seg 8 Ways MCB i/c	A9HPSG08WWB	5596
WWB Acti9 PSG DB 8 Seg 12 Ways MCB i/c	A9HPSG12WWB	7253
WWB Acti9 PSG DB 7 Seg 12 Ways MCCB i/c	A9HPSG12MWWB	7747
WWB for Std VTPN DB MCB i/c	A9HVMXXWB	3144
WWB for Std VTPN DB MCCB i/c	A9HVNXXWB	3347

Modular Distribution Boards - Metallic

Description	Reference	Unit MRP [₹]
Busbars		
Fork Busbar 1P 12MOD. 63A	R9XFH112	1225
Fork Busbar 1P 57MOD. 63A	R9XFH157	2727
Fork Busbar 2P 12MOD. 63A	R9XFH212	1412
Fork Busbar 2P 57MOD. 63A	R9XFH257	5230
Fork Busbar 3P 12MOD. 63A	R9XFH312	3187
Fork Busbar 3P 57MOD. 63A	R9XFH357	11407
Fork Busbar 4P 12MOD. 63A	R9XFH412	2939
Fork Busbar 4P 57MOD. 63A	R9XFH457	12276
Busbar Accessories		
Set of 10 End Caps 1P	R9XE110	*
Set of 10 End Caps 2P	R9XE210	*
Set of 10 End Caps 3P	R9XE310	*
Set of 10 End Caps 4P	R9XE410	*
Set of 20 Tooth Caps	R9XT20	*
Blanking Plate	13229B	62

Note: Blanking Plate MOQ = 10, All other MOQ = 1

Customized Distribution Boards to Suit Your Need - Available on Request*

- TV/Telephone DBs
- Pre-Wired DBs
- 8 Segment DBs
- Acrylic Door DBs
- IP54 DBs
- DBs with Phase Indication Lamps

*upto 32A socket only

*Please contact nearest Schneider Electric Sales Office or Customer Care Center for coordination chart

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15th, 2026